


M223

AIR COMPRESSORS AND TOOLS

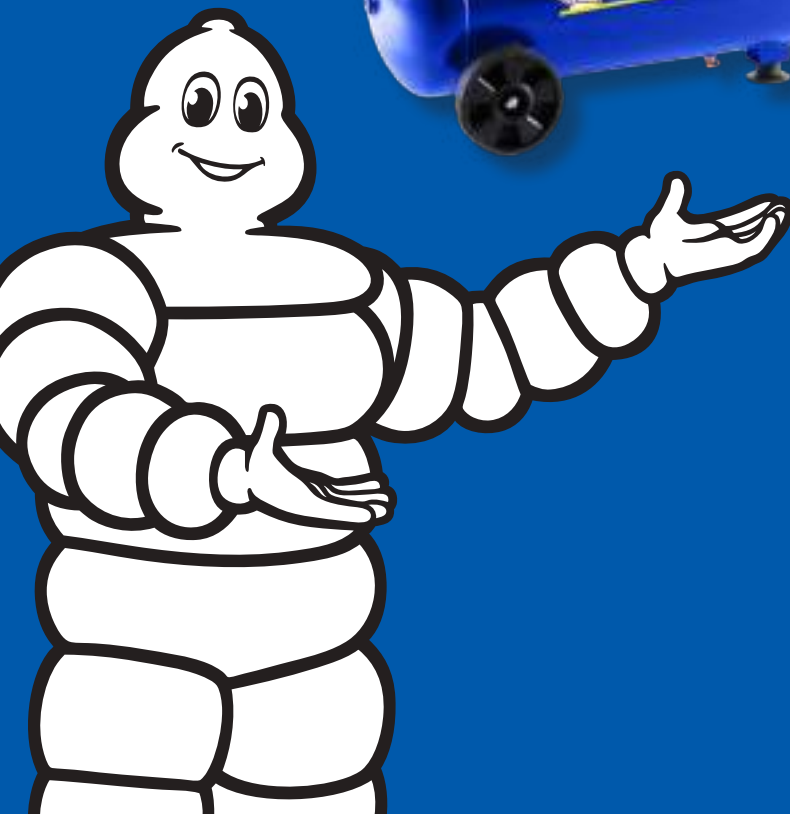

MICHELIN

www.michelin.com



MICHELIN

**FOR ALL YOUR NEEDS,
ALWAYS WITH YOU**



INDEX

OILFREE DIRECT DRIVEN AIR COMPRESSORS

P.07

Air compressor Special design

P. 08 - 12

12V

P.08

MBL-GO COMPACT

P.09

MB1 K11 STANDARD

P.10

MCX 6U

P.11

MBL6

P.12

Silent air compressors

P.13

MX RANGE

P.14 - P.17

MX DUPLEX RANGE

P.18 - P.19

MBN RANGE

P.20 - P.22

Vertical air compressors

MVX RANGE

P.23 - P.25

DIRECT DRIVEN AIR COMPRESSORS

P.26

COLIBRI 110

P.27

MB RANGE

P.28 - P.32

MBV RANGE

P.33 - P.34

BELT DRIVEN AIR COMPRESSOR

P.35

VCX RANGE

P.36

MB RANGE

P.37 - P.40

MCX RANGE

P.41- P.49

MCXT RANGE

P.50

MVX RANGE

P.51

SILENT PISTON AIR COMPRESSORS

P.52

MCX N RANGE

P.53 - P.55

ROTARY SCREW AIR COMPRESSORS

P.56

MC RANGE

P.57 - P.61

RSX DR RANGE

P.62

RSX RANGE

P.63 - P.65

PETROL ENGINE AIR COMPRESSOR

P.66

S RANGE

P.67

MUX RANGE

P.68

PNEUMATIC TOOLS & ACCESSORIES

P.69

PNEUMATIC TOOLS

P.70 - P.73

ACCESSORIES


P.74 - P.85



MICHELIN

www.michelin.com

LEGENDA

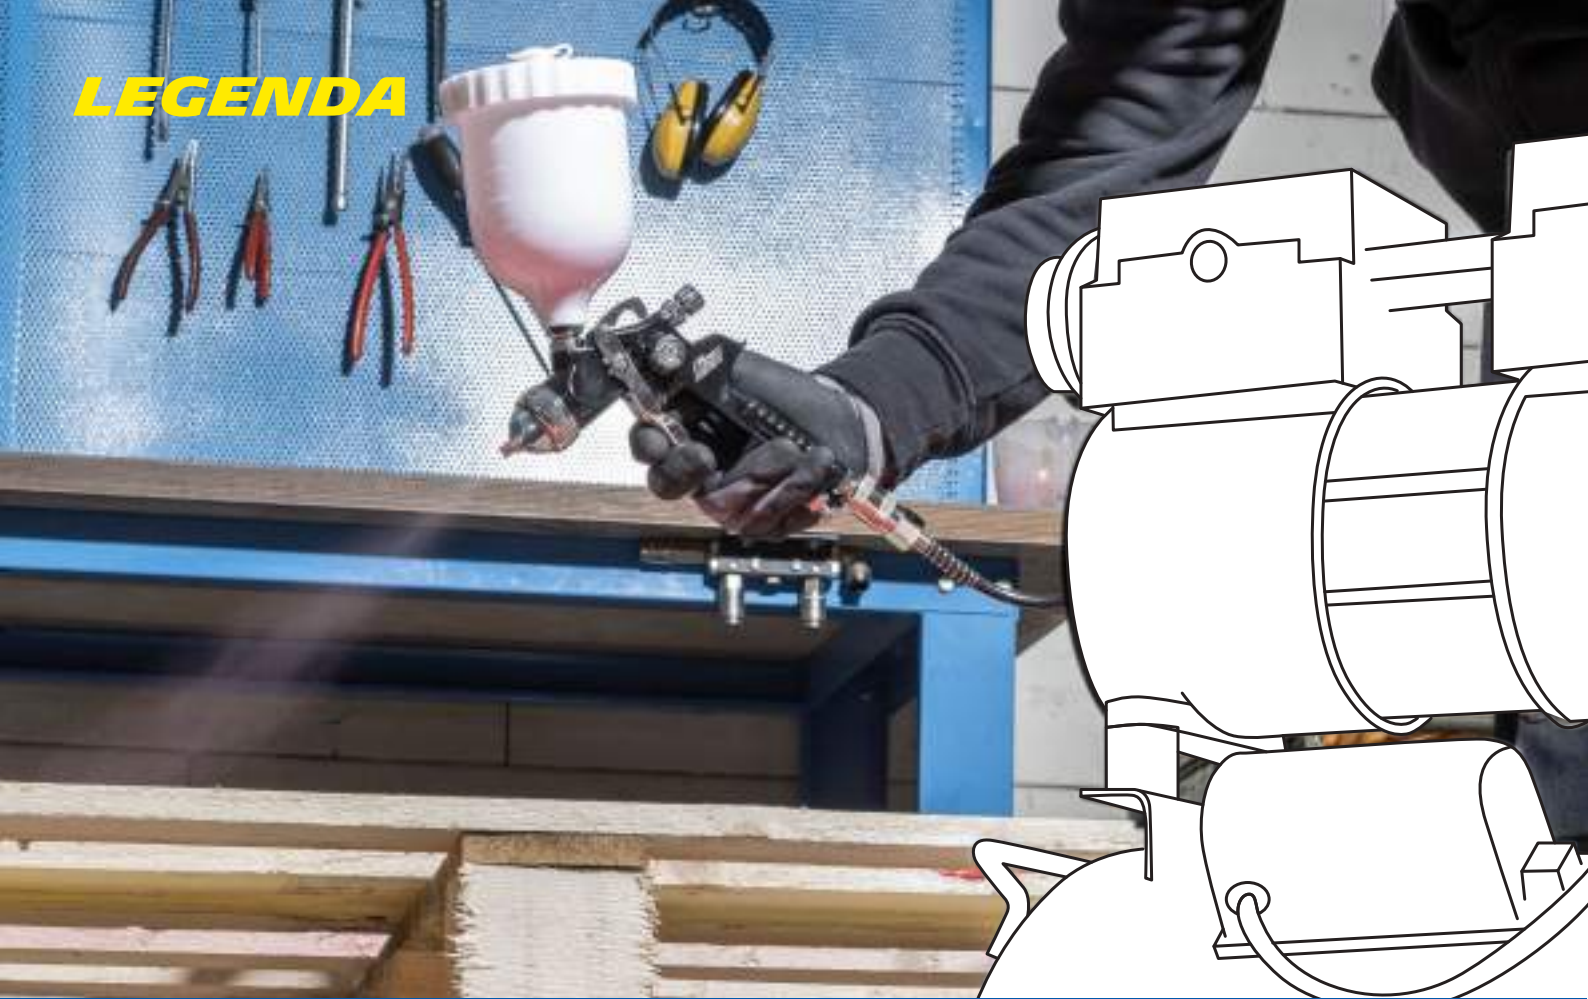

Tank capacity



Air displacement
(1 cu. m. = 1.000 liters)



Max. working pressure



Output power



Rounds per minute



Pump




Cylinders/stages



LwA Noise level in dB(A)
SPL Sound pressure
at 4 meters in dB(A)



Output power



Air flow (1 cu. m.=1000 NI
Normal liters)



Differential pressure



Compressor dimensions



Packing dimensions



Net weight



Gross weight



Conf.

P: Portable
C: Wheels
F: Fixed

WHAT IS SOUND AND HOW TO READ PRODUCT LABELS?

Discover more about sound of air compressors.
By properly reading labels and values you'll be able to take informed decisions, successfully fulfilling your needs.

The sound radiates from a specific source and it is resulting in a sound pressure fluctuation in the air. This means the sound pressure is the effect and the sound power is the cause. A similar process occurs when we are switching on the heating in a room. The electric heater is the source of heat and the change of temperature, in a specific space, is the effect. The input provided by the electrical power is a fixed one, independent of the environment.

When we are using the compressor in a space what we hear is the sound pressure that is, in other words, the relationship between the power of sound of the compressor itself and the environment.

The sound power level LWA dB(A) is expressed in decibels. As said, it represents the acoustic energy emitted by the machine. A standard 3HP air compressor has a sound power level of 93 dB(A).

The sound pressure level LPA dB(A) is expressed in decibels.
The same 3HP air compressor generates a sound pressure level equal to averagely 73 dB(A).

The precise LPA value is dependent on the distance between the source of power and the acoustic environment of propagation.

The standard distance used in this calculation by the industry is 4 meters between the user and machine.
To sum it up: the sound power level of technical sound sources is usually around 10 to 15 dB higher than the sound pressure level at a distance of 1m, and around 20 dB higher for distance of 4m.



Value on compressors label: As regulated by CEE, the sound power (LWA) has to be shown on all the air compressors



dB(A)


59

65

76

Value showed on the catalogue. The value is in dB(A).

COMPARISON FOR A SOUND LEVEL DB(A)

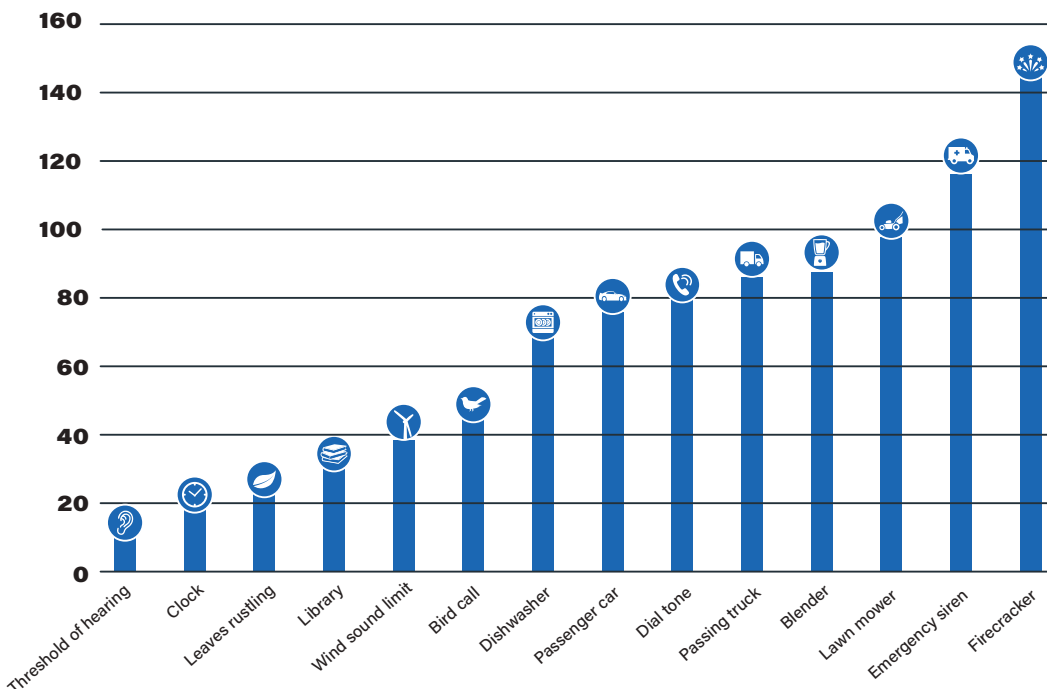


CHOOSE THE RIGHT COMPRESSOR



How to choose an air compressor?

You might want to ponder what kind of air compressor suits your needs, and because of the various technologies and different compressor types available, you may feel confused and overwhelmed in choosing the compressor that's right for you. Let us help you. The first step is to correctly size your new air compressor by paying attention to your intended applications and usages. Size depends from the air flow and pressure, delivered by the air compressor. These two elements are crucial and must be apparent in user's mind. **Pressure** refers to the amount of air the compressor has to provide to perform a given task.



A safe way to find out the total amount of flow needed, is to contact the equipment manufacturer and request data sheets with the required information. Another option is to perform an audit, this can be done by yourself with a little research or by a trained air sales professional, if the workstation/application is complex.


The second stage of choice is related to "what kind of air compressor do I need?" and includes the difference between piston and screw compressors. It is important to choose the technology which best suits your application.

When the application is for intermittent use then piston air compressors are the most simple and robust solutions. If the application requires a continuous air flow, then screw compressors would be the best solution. Please contact a member of the team to discuss your requirements.


The **air flow** required implies the ability of the compressor to continue delivering air for an adequate time frame.



Intermittent uses



Continuous uses



- No compressor in the category is suitable for the requested application
- All compressors in the category are suitable for the requested application



OILFREE DIRECT DRIVEN AIR COMPRESSORS



Blow



Inflate



Wash



Spiking



Paint



Grind



Silicone



Scratch



www.michelin.com

AIR COMPRESSOR SPECIAL DESIGN

MB 12V

Mini 12V digital compressor for cars.
 Inflates from 0.05 bar up to 3.5 bar.
 Allows you to inflate a standard tire in 4 minutes.
 7 liters of air per minute.
 Connection to 12V cigarette lighter socket.
 Approximately 1.8m cord. Backlit digital screen for pressure reading.
 USB port for powering electrical devices (mobile phone charging...).
 10cm nylon air supply hose.
 Brass attachment for a perfect seal on the tire valve. Fits on SCHRADER car and bike valves.
 Ultra compact and robust product. It fits in the glove compartment.
 Reduced noise and vibration.



Inflate



ON/OFF switch



Type	Code	EAN														
			Conf.	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St. St.	dB(A)	LxPxH mm / ins	kg lb
MB 12 V	1126002577	8020119095188	P	7	0.2	0.4	3.5	50.7	0,3	0,2	-	battery	-	90	220x180x90 8.6x7x3.5	5 11



www.michelin.com

Distributed under licence
 by FIAC Professional Air Compressors srl
 (+39) 0516786811 - www.fiac.it

AIR COMPRESSOR SPECIAL DESIGN



OIL FREE

MBL-GO COMPACT

Air compressor with hose reel and 7 m hose.

MBL-GO COMPACT weighs only 6.1kg and takes up very little space. Supplied with blow gun.

Portable or wall mounted

Fits everywhere and helps keep your workshop tidy!

Practical hooking system

All that remains is to make the holes and fix the hooking base to the wall with the screws and dowels included in the package.

Immediately ready!

Simply press the on-off button to get started.

180° rotation and 7m hose

It adapts to any work environment.

The hooking base has a practical support for accessories and allows the compressor to be rotated by 180°.

Oilless

No extra maintenance is required.

Safe and long lasting.

Equipped with an internal thermal protection switch to prevent motor overheating.



Blow



Inflate



Wash



7 m long hose



Wall mounted



ON/OFF switch



Lightweight and portable



180° rotation range



Accessories for every need



Type	Code	EAN	↔	⌚	↻	⌚	⌚	⌚	⌚	⌚	⌚	⌚	⌚	⌚	⌚	⌚
			Conf.	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St. St.	dB(A)	LxPxH mm/ins	kg lb
230/50/1																
MBL-GO COMPACT	4116000650	8024900719390	P	160	5.7	9,6	8	116	1,5	1,1	3450	F3002	-	75	215x295x290 8.4x11.6x11.4	6,5



AIR COMPRESSOR SPECIAL DESIGN



OIL FREE

MB1 K11-EU

The **MB1** air compressor has been designed for all DIY jobs that require compressed air.

Its exceptional characteristics of ease of use, design and versatility make it a product capable of satisfying the most varied needs of use.

Ideal for occasional or intermittent use, easy to transport thanks to its configuration and its weight 8 kg, MB1 is the ideal partner for your hobbies!



Blow



Inflate



Fairing for complete protection



Ergonomic handle



Electrical cable



ON/OFF switch



Type	Code	EAN															
230/50/1			Conf.	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb	
MB1 K11- EU	1129981027	8020119148730	P	160	5.7	9,6	8	116	1,5	1,1	-	F3002	1/1	75	380x140x395 14.9x5.5x15.5	8 17.6	

The kit includes the standard inflation gun



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

AIR COMPRESSOR SPECIAL DESIGN



OIL FREE

MCX 6U

The **MCX 6U** air compressor has been designed for all DIY jobs that require compressed air.

Its exceptional characteristics of ease of use, design and versatility make it a product capable of satisfying the most varied needs of use.

Ideal for occasional or intermittent use, easy to transport thanks to its configuration, MCX 6U is the ideal partner for your hobbies!



Blow



Inflate



Wash



Accessory hook



Ergonomic handle



2 Pressure Vertical air compressors



ON/OFF switch



Total protection



Type	Code	EAN														
			Conf.	l	l/min	CFM	m³/h	bar	psi	Watt	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
230/1/50-60			Conf.	l	160	5.7	9,6	8	116	1100 Peak	2450	F3002	1/1	68	330x117x450 13x8.5x15.8	10 22
MCX 6 U	1129102081	8020119097106	P	6	160	5.7	9,6	8	116	1100 Peak	2450	F3002	1/1	68	330x117x450 13x8.5x15.8	10 22



AIR COMPRESSOR SPECIAL DESIGN



MBL6/1100

The **MBL6** air compressor has been designed for all DIY jobs that require compressed air. Its exceptional characteristics of ease of use, design and versatility make it a product capable of satisfying the most varied needs of use. Ideal for occasional or intermittent use, easy to transport thanks to its configuration, **MBL6** is the ideal partner for your hobbies!



Blow



Inflate



Wash



Ergonomic handle



ON/OFF switch



Pressure regulator



Total protection



Universal air outlet



Type	Code	EAN														
230/1/50			Conf.	l	l/min	CFM	m ³ /h	bar	psi	Watt	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MBL6/1100	1129110224	8020119139707	P	6	160	5.7	9,6	8	116	1100	2450	F3002	1/1	75	395x370x340 15.5x14.5x13.3	10 22

Available also 230/1/60





SERIE MX: THE COMPRESSOR, JUST SILENT

The MX Range, silenced coaxial compressors, combines advanced technical characteristics with a sound impact comparable to the noise of a pleasant conversation.

The captivating design of the pumping unit guarantees safety, comfort and high-level performance at the same time: the MX Range reaches 9 bar of pressure, allowing the use of professional tools despite the small size of the compressor.

Ideal for many applications, the range is supplied with a wide range of powers and in addition the direct oil-free group provides a constant air flow with minimum maintenance required.

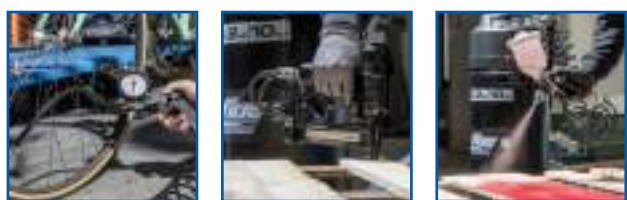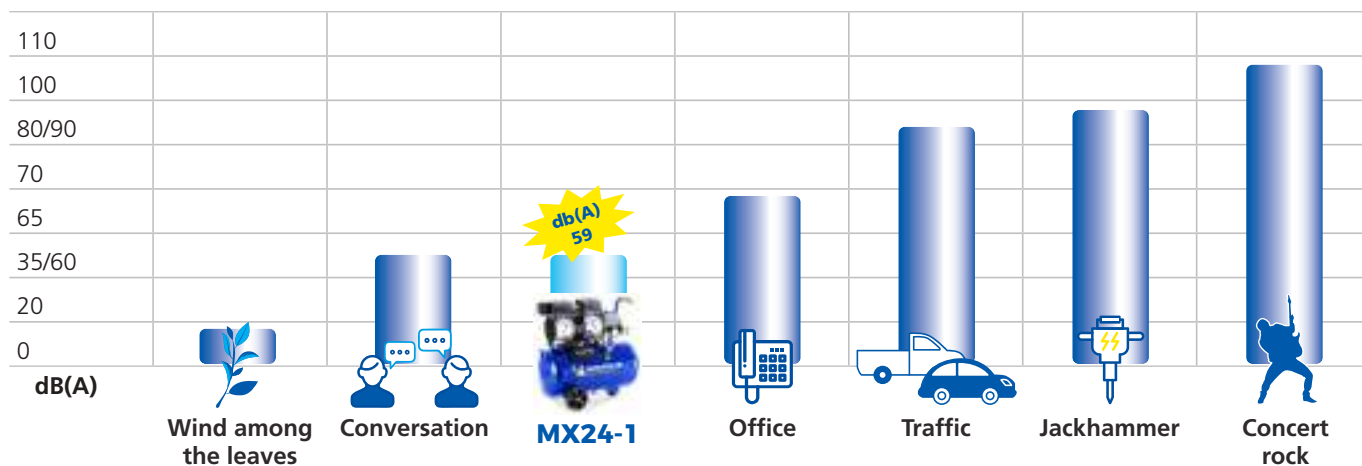

SUPER SILENT



Blow



Inflate



Wash



Scratch



Paint



Spiking



Grind



Screw



MICHELIN

www.michelin.com

SILENT AIR COMPRESSORS - MX RANGE



MX 6-1

The **MX6-1** compressor is equipped with a powerful and extremely silent pumping unit. Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use. Given its silence, it is a precious ally in all environments, even closed ones. Equipped with anti-vibration feet that guarantee stable support when the compressor is running. Portable and compact, it can be used and stored even where space is limited.



Blow



Inflate



Wash



Ergonomic handle



ON/OFF switch



Pressure regulator



Fairing for complete protection



Universal air outlet



Type	Code	EAN															
			Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MX 6-1	1129981152	8020119162774	P	6	106	3.7	6,3	8	116	1	0,7	1450	XS138	2/1	59	390x370x360 15.3x14.5x14.2	15,5 33,9



SILENT AIR COMPRESSORS - MX RANGE



MX 10-1

The **MX10-1** compressor is equipped with a powerful and extremely silent pumping unit.

Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use.

Given its silence, it is a precious ally in all environments, even closed ones.

Portable with wheels and ergonomic handle, and compact, it can be used and stored even where space is limited.



Blow



Inflate



Wash



Scratch



Ergonomic handle



Pressure regulator



Fairing for complete protection



Universal air outlet



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MX 10-1	1129981140	8020119162903	C	10	106	3.7	6,3	8	116	1	0,7	1450	XS138	2/1	59	420x375x580 16.5x14.8x22.8	18 39.6

SILENT AIR COMPRESSORS - MX RANGE



MX 24-1

The **MX24-1** compressor is equipped with a powerful and extremely silent pumping unit. Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use. Given its silence, it is a precious ally in all environments, even closed ones. The tank capacity of 24 liters also makes it suitable for those jobs that require greater use of compressed air. Portable with wheels and ergonomic handle to be transported anywhere.



Inflate



Paint



Wash



Spiking



Ergonomic handle



Pressure regulator



Fairing for complete protection



Universal air outlet



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MX 24-1	1129981148	8020119162699	C	24	106	3.7	6,3	8	116	1	0,7	1450	XS138	2/1	59	558x240x525 21.9x9.4x20.6	20 44



SILENT AIR COMPRESSORS - MX RANGE



MX 50-1

The **MX50-1** compressor is equipped with a powerful and extremely silent pumping unit.

Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use.

Given its silence, it is a precious ally in all environments, even closed ones.

The tank capacity of 50 liters also makes it suitable for those jobs that require greater use of compressed air.

Portable with wheels and ergonomic handle to be transported anywhere.



Inflate



Paint



Wash



Spiking



Ergonomic handle



Pressure regulator



Fairing for complete protection



Universal air outlet



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MX 50-1	1129981153	8020119162569	C	50	106	3.7	6,3	8	116	1	0,7	1450	XS138	2/1	59	585x250x560 23x9.8x22.4	30 66



SILENT AIR COMPRESSORS - DUPLEX RANGE



MX 50-2 DUPLEX

The **MX50-2 Duplex** compressor is equipped with two powerful and extremely silent pumping units, making it the ideal tool for all semi-professional jobs.

For all professionals who require a silent, powerful and reliable work partner.

Completely oil-free, with a tank capacity of 50 litres, it is also suitable for those jobs that require greater use of compressed air. Portable with wheels and ergonomic handle to be transported anywhere.



Inflate



Paint



Wash



Spiking



Grind



Screw



Double pump



Ergonomic handle



Pressure regulator



Universal air outlet



Type	Code	EAN															
			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MX 50-2 DUPLEX	1129981144	8024900719499	C	50	260	9,2	9.1	8	116	2	1,5	1450	XS138	2/1	58	644x339x347 25.4x13.3x13.7	39,5 87



SILENT AIR COMPRESSORS - DUPLEX RANGE



MX 100-2 DUPLEX

The **MX100-2 duplex** compressor is equipped with two powerful and extremely silent pumping units, making it the ideal tool for all semi-professional jobs.

For all professionals who require a silent, powerful and reliable work partner.

Completely oil-free, with a tank capacity of 100 litres, it is also suitable for those jobs that require greater use of compressed air.

Portable with wheels and ergonomic handle to be transported anywhere.



Inflate



Paint



Wash



Spiking



Grind



Screw



Double pump



Ergonomic handle



ON/OFF switch



Pressure regulator



Universal air outlet



Type	Code	EAN															
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MX 100-2 DUPLEX	1129981158	8024900719598	C	100	260	9,2	9.1	8	116	1 + 1	1,5	1450	XS138	2	58	1010x400x652 39.8x15.7x25.7	67 148

VERTICAL AIR COMPRESSORS - MBN RANGE



MBN 24

The MBN 24 compressor is the ideal tool for all semi-professional jobs. For all professionals who require a silent, powerful and reliable work partner.

Completely oil-free, with a tank capacity of 24 litres, it is also suitable for those jobs that require greater use of compressed air.

Portable with wheels and ergonomic handle to be transported anywhere.



Paint



Inflate



Wash



Scratch



Ergonomic handle



ON/OFF switch



Pressure regulator



Universal air outlet



Type	Code	EAN															
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MBN 24	1129102822	8020119141601	C	24	160	5.7	9,6	8	116	0,75	0,6	1450	F130	1/1	59	610x300x580 24x11.8x22.8	24 52.9



SILENT AIR COMPRESSORS - MBN RANGE



MBN 10

The **MBN-10** compressor is equipped with a powerful and extremely silent pumping unit. Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use. Given its silence, it is a precious ally in all environments, even closed ones. Portable with wheels and ergonomic handle to be transported anywhere.



Inflate



Paint



Wash



Spiking



Ergonomic handle



ON/OFF switch



Pressure regulator



Universal air outlet



Type	Code	EAN															
			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MBN 10	1129102913	upon request	C	10	140	4,9	8,4	9	130	0.75	0.6	1500	XS88	2/1	59	640x350x340 25.2x13.8x13.4	25 55

VERTICAL AIR COMPRESSORS - MBN RANGE



MBN 10/2

The **MBN 10/2** compressor is equipped with a powerful and extremely silent pumping unit.

Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use.

Given its silence, it is a precious ally in all environments, even closed ones.

Portable with wheels and ergonomic handle to be transported anywhere.



Blow



Inflate



Wash



Scratch



Ergonomic handle



ON/OFF switch



Pressure regulator



Universal air outlet



Type	Code	EAN																
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb	
MBN 10/2	1129741024	8020119164013	C	10	230	8,1	13,8	9	130	2	1.5	1420	XS258	2/1	59	640x350x340 25.2x13.8x13.4	25 55	



VERTICAL AIR COMPRESSORS - MVX RANGE

MVX24

The **MVX24** air compressor was designed for the hobbyist. Its exceptional characteristics of ease of use, design and versatility make it a product capable of satisfying the most varied needs of use.

It is ideal for occasional or intermittent use for applications such as inflating, blowing, cleaning, air brushing, stapling, simple painting, Spiking and many more. **MVX24** is also easy to transport thanks to its Portable configuration and a weight of 15 KG. Its oil-free configuration, in addition to reducing maintenance costs, will allow the workplace to be kept clean.



Blow



Inflate



Wash



Scratch



Ergonomic handle



ON/OFF switch



Pressure regulator



Universal air outlet



Antivibrating feet



Type	Code	EAN															
230/1/50-60			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MVX24	1129102788	8020119087978	C	24	160	5.7	9,6	8	116	1,5	1,1	-	F3002	1/1	70	320x320x630 12.6x12.6x24.8	14,5 33

VERTICAL AIR COMPRESSORS - MVX RANGE



MVX 50/1

The **MVX50-1** compressor is equipped with a powerful and extremely silent pumping unit. Completely oil-free, it ensures perfect operation for all those jobs that require compressed air for both domestic and professional use. Given its silence, it is a precious ally in all environments, even closed ones. The tank capacity of 50 liters also makes it suitable for those jobs that require greater use of compressed air. Portable with wheels and ergonomic handle to be transported anywhere.



Inflate



Paint



Wash



Spiking



Ergonomic handle



ON/OFF switch



Pressure regulator



Fairing for complete protection



Universal air outlet



Type	Code	EAN																
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb	
MVX 50/1	1129981146	8024900719512	C	50V	106	3.7	6,3	8	116	1	0,7	-	XS138	2/1	59	320x335x1047 12.6x13x41.2	28,5 62,8	



VERTICAL AIR COMPRESSORS - MVX RANGE

MVX 50/2

The **MVX50-2** compressor is the ideal tool for all semi-professional jobs. For all professionals who require a silent, powerful and reliable work partner. Completely oil-free, with a tank capacity of 50 litres, it is also suitable for those jobs that require greater use of compressed air. Portable with wheels and ergonomic handle to be transported anywhere.



Paint



Inflate



Wash



Scratch



ON/OFF switch



Manometro



Cable holder hook



Universal air outlet



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MVX 50/2	1129980999	8020119136546	C	50	220	7.8	13,2	10	145	2	1,5	-	F3002	-	72	320x350x1000 12.5x13.7x39.3	25 55.1

DIRECT DRIVEN AIR COMPRESSOR



Drill



Inflate



Wash



Paint



Grind



Screw



Scratch



DIRECT DRIVEN AIR COMPRESSOR

COLIBRI 110

Portable compressor for professional use and for hobbyists. Handy: equipped with a comfortable grip on the engine cover to facilitate transport, the grip is secure thanks to the correct distribution of weights and the comfortable rubber handle

Silent: only 62 db. Excellent value for maintenance work within condominium areas.

Compact: it can also be conveniently stored in the trunk of any car thanks to its small size.



Paint



Inflate



Wash



Scratch



Plastic shroud protects hot and rotating parts



Universal air outlet



Pressure switch with thermal protection



Solid shock



Ergonomic handle



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St. St.	dB(A)	LxPxH mm/ins	Kg lb
COLIBRI 110	4116001315	8024900728682	P	3	85	3	5,1	15	217	0,75	0,6	1420	GM110	1/1	62	285x450x480 11.2x17.6x18.8	18 39.7

DIRECT DRIVEN AIR COMPRESSOR - MB RANGE

MB 2420

Compressor suitable for all hobby jobs where precision and reliability are required.

With pressure reducer with double gauge, handles and wheels for easy transport makes this compressor the ideal partner for all major compressed air applications, ideal for inflate, blow, wash, fix with nails and staples, paint small surfaces.



Paint



Inflate



Wash



Scratch



Plastic shroud protects hot and rotating parts



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN															
			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg / lb
230/1/50																	
MB 2420	1129781021	upon request	C	24	170	6	10,3	8	116	2	1,1	2850	GM148	1/1	72	610x310x580 24x12.2x22.8	28 61.7



DIRECT DRIVEN AIR COMPRESSOR - MB RANGE

MB 5020

Compressor suitable for all hobby jobs where precision and reliability are required.

With pressure reducer with double gauge, handles and wheels for easy transport makes this compressor the ideal partner for all major compressed air applications, ideal for inflate, blow, wash, fix with nails and staples, paint small surfaces.



Paint



Inflate



Wash



Scratch



Plastic shroud protects hot and rotating parts



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN															
230/1/50			Conf.	I	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg / lb
MB 5020	1129781022	upon request	C	50	170	6	10,3	8	116	2,5	1,9	2850	GM194	1/1	72	770x430x660 30.3x16.9x25.9	35 77

DIRECT DRIVEN AIR COMPRESSOR - MB RANGE

MB 2425

Compressor suitable for all hobby jobs where precision and reliability are required.

With pressure reducer with double gauge, handles and wheels for easy transport makes this compressor the ideal partner for all major compressed air applications, ideal for inflate, blow, wash, fix with nails and staples, paint small surfaces.



Paint



Inflate



Wash



Scratch



Plastic shroud protects hot and rotating parts



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN																
230/1/50			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg / lb	
MB 2425	1129981065	8020119162217	C	50	170	6	10,2	10	145	2,5	1,9	2850	GM194	2/1	72	585x250x560 23x9.8x22	35 77	



DIRECT DRIVEN AIR COMPRESSOR - MB RANGE

MB 5025

Compressor suitable for all hobby jobs where precision and reliability are required.

With pressure reducer with double gauge, handles and wheels for easy transport makes this compressor the ideal partner for all major compressed air applications, ideal for inflate, blow, wash, fix with nails and staples, paint small surfaces.



Paint



Inflate



Wash



Scratch



Plastic shroud protects hot and rotating parts



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN															
			Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg / lb
230/1/50																	
MB 5025	1129981066	8020119162255	C	24	170	6	10,2	8	116	2,5	1,9	2850	GM194	2/1	72	695x330x745 27x13x29.3	35 77

DIRECT DRIVEN AIR COMPRESSOR - MB RANGE

MB 3650

The **MB3650** compressor constantly supplies optimal air pressure thanks to its 50 liter capacity. It can be used for a long time without loss of pressure and has a large practical pull handle and double feet to ensure optimal stability. The MB3650 compressor can be used for many jobs, such as inflate tyres, spray paint or blow clean parts. It can serve both a professional craftsman and a DIY enthusiast as it is convenient to use in virtually any workspace.

This high-quality Italian device has a motor power of 3 HP, which ensures excellent pressure build-up and fast air suction.



Drill



Screw



Grind



Inflate



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg / lb
MB3650	1129981053	8020119156322	C	50	365	12.8	21,9	10	145	3	2,2	2820	VX360	2/1	73	710x330x620 27.9x12.9x24.4	39 85.9



DIRECT DRIVEN AIR COMPRESSOR - MBV RANGE

MBV 50

The **MBV50** compressor constantly supplies optimal air pressure thanks to its 50 liter capacity. It can be used for a long time without loss of pressure and has a large practical pull handle and double feet to ensure optimal stability. The MBV50 compressor can be used for many jobs, such as inflate tyres, spray paint or blow clean parts. It can serve both a professional craftsman and a DIY enthusiast as it is convenient to use in virtually any workspace.

This high-quality Italian device has a motor power of 3 HP, which ensures excellent pressure build-up and fast air suction.



Drill



Screw



Grind



Inflate



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN															
			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg / lb
MBV50	1129102749	8020119138069	C	50	360	12,7	21.6	10	145	3	2,2	2850	VX360	2/1	73	830x350x740 32.7x13.8x29	42,4 93.5

DIRECT DRIVEN AIR COMPRESSOR - MBV RANGE

MBV 100/3

The **MBV100/3** compressor constantly supplies optimal air pressure thanks to its 100 liter capacity. It can be used for a long time without loss of pressure and has a large practical pull handle and double feet to ensure optimal stability.

The MBV100/3 compressor can be used for many jobs, such as inflate tyres, spray paint or blow clean parts. It can serve both a professional craftsman and a DIY enthusiast as it is convenient to use in virtually any workspace.

This high-quality Italian device has a motor power of 3 HP, which ensures excellent pressure build-up and fast air suction.



Drill



Screw



Grind



Inflate



Universal air outlet



Pressure switch with thermal protection



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN															
230/1/50			Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm/ins	kg lb
MBV 100/3	1129102951	8020119150825	C	100	360	12,7	21.6	10	145	3	2,2	2850	VX360	2/1	73	1200x400x830 47.2x15.7x32.6	74 163



BELT DRIVEN AIR COMPRESSOR



Wash



Inflate



Paint



Scratch



Drill



Screw



Grind



www.michelin.com

BELT DRIVEN AIR COMPRESSOR - VCX RANGE

VCX 50 - VCX 100 VCX 150 - VCX 200

Belt-driven compressor, 3 hp, 10 bar, with different tank configurations from 50L to 200L.

Oil lubricated; it is ideal for work in the workshop, with intensive use

The belt drive allows operation at low rpm ensuring reliability and durability over time.

The twin-cylinder pumping unit ensures high efficiency by guaranteeing a long-term air reserve.

The pivoting wheels guarantee great ease of movement.



Drill



Screw



Grind



Inflate



Double cylinder in cast iron



Universal air outlet



Pressure switch with thermal protection



Larger oil glass



Swivel wheel



Type	Code	EAN	Volt/Hz	Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
VCX 50/3	1121450899	8020119105917	230/1/50	C	50	350	12.4	21	10	145	3	2,2	1375	VCF3	2/1	74	1120x320x700 44x12.5x27.5	58 127.8
VCX 100/3	1121470289	8020119066652	230/1/50	C	100	350	12.4	21	10	145	3	2,2	1375	VCF3	2/1	74	1110x420x825 43.7x16.5x32.4	67 147.7
VCX 150/3	1121470444	8020119074503	230/1/50	C	150	350	12.4	21	10	145	3	2,2	1375	VCF3	2/1	74	1287x420x825 50.6x16.5x32.4	90 198.4
VCX 150/3	1121470255	8020119092675	230/1/50	C	150	350	12.4	21	10	145	3	2,2	1375	VCF3	2/1	74	1287x420x825 50.6x16.5x32.4	90 198.4
VCX 200/3	1121470332	8020119159514	230/1/50	C	200	350	12.4	21	10	145	3	2,2	1375	VCF3	2/1	74	1565x470x1095 61.6x18.5x43.1	105 231.4



BELT DRIVEN AIR COMPRESSOR - MB RANGE

MB 50/2 - MB 100/2 MB 150/2 - MB 200/2

The Michelin piston air compressor of the MB 268 range was designed for professionals, however it is also an excellent solution for hobbyists thanks to its characteristics of reliability, stability and sturdiness.

It is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

Performance, sound efficiency, versatility, ease of transport are the characteristics that make the Michelin MB 268 compressor the ideal partner for all professional jobs.



Paint



Screw



Scratch



Inflate



Larger oil glass



Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN	Volt/Hz	Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MB 50/268	1129102943	8020119150139	230/1/50	C	50	250	8.8	15	10	145	2	1,1	1240	AB268	2/1	72	1010x360x730 46.6x14x27.5	50 110.2
MB 100/268	1129102965	8020119152072	230/1/50	C	100	250	8.8	15	10	145	2	1,1	1240	AB268	2/1	72	1100x400x830 42.9x15.6x32.4	63 138.8
MB 150/268 PP	1121431033	upon request	230/1/50	C	150	250	8.8	15	10	145	2	1,5	1240	AB268	2/1	72	1360x540x1060 53x21x41.3	95 209.4
MB 200/268 PP	1121431018	8024900731576	230/1/50	C	200	250	8.8	15	10	145	2	1,5	1240	AB268	2/1	72	1460x640x1140 56.9x24.9x44.5	95 209.4

BELT DRIVEN AIR COMPRESSOR - MB RANGE

MB 50/3 - MB 100/3 MB 150/3 - MB 200/3

The Michelin piston air compressor of the MB 348 range was designed for professionals, however it is also an excellent solution for hobbyists thanks to its characteristics of reliability, stability and sturdiness.

It is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

Performance, sound efficiency, versatility, ease of transport are the characteristics that make the Michelin MB 348 compressor the ideal partner for all professional jobs.



Drill



Screw



Grind



Inflate



Larger oil glass




Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN																
			Volt/Hz	Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./ St.	dB(A)	LxPxH mm ins	kg lb
MB 50/348	1129741225	upon request		C	50	260	9.2	15,6	10	145	3	2,2	1300	AB348	2/1	74	1010x360x730 46.6x14x27.5	50 110
MB 100/348	1129741208	upon request		C	100	260	9.2	15,6	10	145	3	2,2	1300	AB348	2/1	74	1100x400x830 42.9x15.6x32.4	64 141
MB 150/348	1129741226	upon request		C	150	260	9.2	15,6	10	145	3	2,2	1300	AB348	2/1	74	1360x540x1060 53x21x41.3	90 200
MB 200/348 PP	1121432017	upon request	230/1/50	C	200	260	9.2	15,6	10	145	3	2,2	1300	AB348	2/1	74	1100x400x830 42.9x15.6x32.4	95 209.4
MB 200/348 PP	1121436008	8024900722567	230/3/50	C	200	260	9.2	15,6	10	145	3	2,2	1300	AB348	2/1	74	1100x400x830 42.9x15.6x32.4	95 209.4



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

BELT DRIVEN AIR COMPRESSOR - MB RANGE

MB 3/100 - MB 3/150 MB 3/200

With a power of 3 horsepower, this compressor has an intake air flow rate of 350 l/min and guarantees a maximum pressure of 10 bar.

It is ideal for professional use and for applications including inflating, blowing, cleaning, air brushing, stapling, simple painting, nailing and many more.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Larger oil glass



Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN	Volt/Hz	Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MB 100/360 PP	1121482002	8024900731934	230/1/50	C	100	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1100x400x830 42.9x15.6x32.4	69 152.1
MB 100/360 PP	1121482001	upon request	230/1/50	C	100	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1100x400x830 42.9x15.6x32.4	88 194
MB 150/360 PP	1121482004	8020119164532	230/1/50	C	150	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1360x540x1060 53x21x41.3	86 189.5
MB 150/360 PP	1121484002	8020119164471	230/1/50	C	150	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1360x540x1060 53x21x41.3	95 209.4
MB 200/360 PP	1121483002	8024900729191	230/1/50	C	200	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1460x640x1140 56.9x24.9x44.5	88 194
MB 200/360 PP	1121486003	8024900729207	230/3/50	C	200	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1460x640x1140 56.9x24.9x44.5	95 209.4



MICHELIN

www.michelin.com

BELT DRIVEN AIR COMPRESSOR - MB RANGE

MB 415/100

This compressor is ideal for professional use and for applications including inflating, blowing, cleaning, air brushing, stapling, simple painting, nailing and many more.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Larger oil glass



Swiwel wheel



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN																
			Volt/Hz	Conf.	l	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./ St.	dB(A)	LxPxH mm ins	kg lb
MB 100/415 PP	1121491006	8020119164525	230/1/50	C	100	400	14.1	24	10	145	3	2,2	1000	AB415	2/1	76	1100x400x830 42.9x15.6x32.4	86 189.5

BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 360/200 - MCX 360/300

The Michelin MCX 360 compressor is the top model for demanding professionals and hobbyists who want a reliable and long-lasting belt-driven machine.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Larger oil glass



Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle



Type	Code	EAN	Icons: Truck, Wheel, Gauge, Motor, Pump, Tank, Noise, Prohibited, Bag															
			Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MCX 200/360	1121470107	8020119021743	230/1/50	C	200	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1460x640x1140 56.9x24.9x44.5	88 194
MCX 300/360 PP	1121485001	8020119165294	230/1/50	C	270	350	12.4	21	10	145	3	2,2	1500	AB360	2/1	74	1600x560x1040 62.4x22x40.9	145 319.6
MCX 300/360	1121470122	8020119080207	400/3/50	C	270	350	12.4	21	10	145	4	3	1500	AB360	2/1	74	1600x560x1040 62.4x22x40.9	145 319.6



MICHELIN

BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 415/200 - MCX 415/300

The Michelin **MCX 415** compressor is the top model for demanding professionals and hobbyists who want reliable and long-lasting belt-driven machine.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Larger oil glass



Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle

Control panel with timer



Type	Code	EAN	Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MCX 200/415	1121490624	8020119100592	230/1/50	C	200	400	14.1	24	10	145	3	2,2	1000	AB515	2/1	76	1460x460x1140 57.5x17.9x44.4	109 240
MCX 200/415 PP	1121491004	8020119164464	230/1/50	C	200	400	14.1	24	10	145	3	2,2	1000	AB415	2/1	76	1460x460x1140 57.5x17.9x44.4	109 240
MCX 200/415°	1121490607	8020119090152	230/3/50	C	200	400	14.1	24	10	145	3	2,2	1000	AB515	2/1	76	1460x460x1140 57.5x17.9x44.4	125 275.5
MCX 200/415 PP	1121491003	8020119164396	230/3/50	C	200	400	14.1	24	10	145	3	2,2	1000	AB415	2/1	76	1460x460x1140 57.5x17.9x44.4	125 275.5
MCX 300/415	1121490834	8020119098899	230/1/50	C	270	400	14.1	24	10	145	3	2,2	1000	AB515	2/1	76	1600x560x1040 62.4x22x40.9	160 352.7

°With control panel with timer



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 515/100 - MCX 515/200 MCX 515/300

The Michelin **MCX 515** compressor is the top model for demanding professionals and hobbyists who want a reliable and long-lasting belt-driven machine.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Larger oil glass



Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle

Control panel with timer



Type	Code	EAN																
			Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MCX 100/515 PP	1121491002	8024900726312	230/1/50	C	100	510	18.2	30,6	10	145	4	3	1280	AB515	2/1	78	1100x400x830 42.9x15.6x32.4	60 132.2
MCX 200/515 PP	1121491048	8020119163788	230/1/50	C	200	510	18.2	30,6	10	145	4	3	1280	AB515	2/1	78	1460x460x1140 57.5x17.9x44.4	95 209.4
MCX 200/515 PP	1121491016	8020119163665	230/3/50	C	200	510	18.2	30,6	10	145	4	3	1280	AB515	2/1	78	1460x460x1140 57.5x17.9x44.4	95 209.4
MCX 300/515 PP	1121491034	upon request	400/3/50	F	270	510	18.2	30,6	10	145	4	3	1280	AB515	2/1	78	1600x560x1040 62.4x22x40.9	150 330.6
MCX 300/515°	1121520402	8020119006696	400/3/50	F	270	510	18.2	30,6	10	145	4	3	1280	AB515	2/1	78	1600x560x1040 62.4x22x40.9	140 308.6

°With control panel with timer

BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 525/300 - MCX 525/500

The Michelin **MCX 525** compressor is the top model for demanding professionals and hobbyists who want a reliable and long-lasting belt-driven machine.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Larger oil glass



Swivel wheel



2 Pressure Vertical air compressors



Ergonomic handle

Control panel with timer



Type	Code	EAN	Icons: [Truck], [Motor], [Pressure Gauge], [Air Hose], [Timer], [Vertical Compressor], [Oil Glass], [Swivel Wheel], [Ergonomic Handle]												LxPxH mm ins	kg lb		
			Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump			Cil./St.	dB(A)
MCX 200/525°	1121490655	8020119128206	230/3/50	C	200	440	15.5	26,4	10	145	5,5	4	1280	AB525	2/2	72	1460x460x1140 57.5x17.9x44.4	105 231,4
MCX 300/525°	1121490816	8020119093290	400/3/50	C	270	490	17.3	29,4	10	145	5,5	4	1440	AB525	2/2	76	1600x560x1040 62.4x22x40.9	173 381,3
MCX 300/525°	1121520124	8020119094297	400/3/50	F	270	490	17.3	29,4	10	145	5,5	4	1440	AB525	2/2	76	1600x560x1040 62.4x22x40.9	140 308,6
MCX 300/525°	1121540012	8020119091531	400/3/50	F	270	490	17.3	29,4	15	217	5,5	4	1440	AB525	2/2	76	1600x560x1040 62.4x22x40.9	160 352,7

°With control panel with timer



BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 598/300 - MCX 598/500

The Michelin **MCX 598** piston air compressor was designed for demanding professionals and hobbyists who need a reliable belt driven compressor.

Powerful yet durable and easy to use, this range of compressors is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.



Drill



Screw



Grind



Inflate



Cast iron cylinder



Pressure switch with overload protection



Cooling pipes



Pressure regulator

Control panel with timer



Type	Code	EAN	Icons: [Drill] [Screw] [Grind] [Inflate] [Cast iron cylinder] [Pressure switch with overload protection] [Cooling pipes] [Pressure regulator]														LxPxH mm ins	kg lb
			Volt/Hz	Conf.	I	l/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./ St.	dB(A)		
MCX 200/598°	1121550225	8020119124307	400/3/50	C	200	600	21.1	35.9	10	145	5,5	4	1270	AB598	2/2	75	1460x460x1140 57.5x17.9x44.4	105 231.4
MCX 300/598°	1121550510	8020119107690	230/3/50	C	270	600	21.1	35.9	10	145	5,5	4	1270	AB598	2/2	75	1600x560x1040 62.4x22x40.9	145 319.6
MCX 300/598°	1121550576	8020119123683	400/3/50	F	270	600	21.1	35.9	10	145	5,5	4	1270	AB598	2/2	75	1600x560x1040 62.4x22x40.9	150 330.6
MCX 300/598°	1121550667	8020119157381	400/3/50	C	270	600	21.1	35.9	11	159	5,5	4	1270	AB598	2/2	75	1600x560x1040 62.4x22x40.9	145 319.6
MCX 500/598°	1121550828	8020119117361	400/3/50	F	500	600	21.1	35.9	10	145	5,5	4	1270	AB598	2/2	75	1970x590x1300 76.8x23x50.7	235 518

°With control panel with timer

BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 678/300

The Michelin **MCX 678** compressor is the top model for demanding professionals and hobbyists who want a reliable and long-lasting belt-driven machine.

Its oil injected configuration, in addition to reducing management costs, will allow simple maintenance operations to be carried out quickly and easily; easy transport thanks to its mobile configuration with rubber wheels.

This air compressor is equipped with Pressure regulator, Universal air outlet, 2 Pressure Vertical air compressors, ON/OFF button, Cast iron cylinder, metal cover, automatic belt tensioner and oil level indicator.



Drill



Screw



Grind



Inflate



Cast iron cylinder



Pressure switch with overload protection



Cooling pipes



Pressure regulator

Control panel with timer



Type	Code	EAN	Volt/Hz	Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MCX 300/678°	1121560315	8020119110669	400/3/50	F	270	650	23	39	10	145	5,5	4	1000	AB678	2/2	74	1600x560x1040 62.4x22x40.9	150 330.6
MCX 300/678°	1121560319	8020119111772	400/3/50	C	270	650	23	39	10	145	5,5	4	1000	AB678	2/2	74	1600x560x1040 62.4x22x40.9	160 352.7
MCX 300/678°	1121560322	8020119112083	400/3/50	F	270	650	23	39	15	217	5,5	4	1000	AB678	2/2	74	1600x560x1040 62.4x22x40.9	160 352.7
MCX 300/678°	1121560393	8020119151068	230/3/50	F	270	650	23	39	14	203	5,5	4	1000	AB678	2/2	74	1600x560x1040 62.4x22x40.9	160 352.7
MCX 300/678°	1121560394	8020119151648	220/3/60	F	270	650	23	39	10	145	5,5	4	1000	AB678	2/2	74	1600x560x1040 62.4x22x40.9	160 352.7

°With control panel with timer



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

BELT DRIVEN AIR COMPRESSOR - MCX RANGE

**MCX 808/150 - MCX 808/300
MCX 808/500**

The Michelin **MCX 808** piston air compressor was designed for demanding professionals and hobbyists who need a reliable belt driven compressor.

Powerful yet durable and easy to use, this range of compressors is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

It is to be considered the top for reliability, silence, durability, energy efficiency and maintenance.



Drill



Screw



Grind



Inflate



Cast iron cylinder



Pressure switch with overload protection



Cooling pipes



Pressure regulator

Control panel with timer



Type	Code	EAN																
			Volt/Hz	Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg/lb
MCX 150/808	1121550132	8020119155547	400/3/50	C	150	800	28.2	48	10	145	7,5	5,5	1350	AB808	2/2	76	1360x540x1060 53x21x41.3	90 198.4
MCX 300/808°	1121550561	8020119116616	230/3/50	C	270	800	28.2	48	10	145	7,5	5,5	1350	AB808	2/2	76	1600x560x1040 62.4x22x40.9	175 385.8
MCX 500/808°	1121550838	8020119119983	400/3/50	C	500	800	28.2	48	10	145	7,5	5,5	1350	AB808	2/2	76	1970x590x1300 76.8x23x50.7	220 485
MCX 500/808°	1121550824	8020119116234	400/3/50	F	500	800	28.2	48	10	145	7,5	5,5	1350	AB808	2/2	76	1970x590x1300 76.8x23x50.7	145 319.6
MCX 500/808°	1121550829	8020119118054	400/3/50	F	500	589	20.8	35.3	15	217	7,5	5,5	1350	AB808	2/2	76	1970x590x1300 76.8x23x50.7	220 485

°With control panel with timer



BELT DRIVEN AIR COMPRESSOR - MCX RANGE

MCX 858/300 - MCX 858/500

The Michelin **MCX 858** piston air compressor was designed for professionals who need a reliable belt driven compressor.

Powerful yet durable and easy to use, this range of compressors is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

It is to be considered the top for reliability, silence, durability, energy efficiency and maintenance.



Drill



Screw



Grind



Inflate



Cast iron cylinder



Pressure switch with overload protection



Cooling pipes



Pressure regulator

Control panel
with timer



Type	Code	EAN																
			Volt/Hz	Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./ St.	dB(A)	LxPxH mm ins	kg lb
MCX 300/858°	1121570313	8020119111789	230/3/50	C	270	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1600x560x1040 62.4x22x40.9	150 330.6
MCX 300/858°	1121570573	8020119121290	400/3/50	F	270	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1600x560x1040 62.4x22x40.9	155 341.7
MCX 300/858°	1121570316	8020119112427	230/3/50	F	270	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1600x560x1040 62.4x22x40.9	150 330.6
MCX 300/858	1121570388	8020119151051	230/3/50	F	270	589	20.8	35.3	14	203	7,5	5,6	1350	AB858	2/2	76	1600x560x1040 62.4x22x40.9	155 341.7
MCX 300/858°	1121570318	8020119112564	400/3/50	F	270	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1600x560x1040 62.4x22x40.9	155 341.7
MCX 500/858°	1121570716	8020119111871	400/3/50	F	500	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1970x590x1300 76.8x23x50.7	255 562.1
MCX 500/858°	1121570717	8020119111888	400/3/50	F	500	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1970x590x1300 76.8x23x50.7	235 518
MCX 500/858	1121570728	8020119114834	230/1/50	F	500	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1970x590x1300 76.8x23x50.7	230 507
MCX 500/858°	1121570762	8020119125946	400/3/50	F	500	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1970x590x1300 76.8x23x50.7	235 518
MCX 500/858°	1121570740	8020119119808	400/3/50	F	500	589	20.8	35.3	15	217	7,5	5,6	1350	AB858	2/2	76	1970x590x1300 76.8x23x50.7	235 518

°With control panel with timer



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

BELT DRIVEN AIR COMPRESSOR - MCX RANGE**MCX 998/300 - MCX 998/500**

The Michelin **MCX 998** piston air compressor was designed for professionals who need a reliable belt driven compressor.

Powerful yet durable and easy to use, this range of compressors is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

It is to be considered the top for reliability, silence, durability, energy efficiency and maintenance.



Drill



Screw



Grind



Inflate



Cast iron cylinder



Pressure switch with overload protection



Cooling pipes



Pressure regulator

Control panel
with timer

Type	Code	EAN																
			Volt/Hz	Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./ St.	dB(A)	LxPxH mm ins	kg lb
MCX 300/988	1121580116	8020119121382	400/3/50	C	270	830	29.3	50	15	217	7,5	5,6	1270	AB998	2/2	78	1600x560x1040 62.4x22x40.9	165 363
MCX 300/998**	1121580127	8020119155554	400/3/50	F	270	830	29.3	50	15	217	10	7,5	1270	AB998	2/2	76	1600x560x1040 62.4x22x40.9	170 374
MCX 500/988	1121580329	8020119112489	400/3/50	F	500	830	29.3	50	15	217	10	7,5	1270	AB998	2/2	78	2080x710x1300 81.9x28x51.2	230 507
MCX 500/998	1121580387	8020119125731	400/3/50	F	500	1070	37.8	64,2	10	145	10	7,5	1270	AB998	2/2	76	2080x710x1300 81.9x28x51.2	235 518
MCX 500/998	1121580357	8020119116630	400/3/50	F	500	1070	37.8	64,2	15	217	10	7,5	1070	AB998	2/2	76	2080x710x1300 81.9x28x51.2	235 518
MCX 500/998	1121580409	8020119135716	400/3/50	F	500	1070	37.8	64,2	15	217	10	7,5	1070	AB998	2/2	76	2080x710x1300 81.9x28x51.2	235 518
MCX 500/998*	1121580415	8020119137406	400/3/50	F	500	1070	37.8	64,2	15	217	10	7,5	1070	AB998	2/2	76	2080x710x1300 81.9x28x51.2	235 518
MCX 500/998	1121580422	8020119143216	230/3/50	F	500	1070	37.8	64,2	15	217	10	7,5	1070	AB998	2/2	76	2080x710x1300 81.9x28x51.2	235 518
MCX 500/998**	1121580459	8020119162675	400/3/50	F	500	1070	37.8	64,2	15	217	10	7,5	1070	AB998	2/2	76	2080x710x1300 81.9x28x51.2	235 518

With control panel with timer

* with electric starter

** automatic star-delta starter

BELT DRIVEN AIR COMPRESSOR - MCXT RANGE

MCXT 500

The Michelin **MCXT 500** piston air compressor was designed for professionals who need a reliable belt driven compressor.

Powerful yet durable and easy to use, this range of compressors is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

It is to be considered the top for reliability, silence, durability, energy efficiency and maintenance.



Drill



Screw



Grind



Inflate



Cast iron cylinder



Pressure switch with overload protection




Cooling pipes



Pressure regulator

Control panel
with timer



Type	Code	EAN																
			Volt/Hz	Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm ins	kg lb
MCXT 500/996	1121550982	8020119129845	400/3/50	F	500	1080	38.1	64,8	10	145	4+4	3+3	1170	AB598	2/2	77	2050x590x1170 80x23.1x45.6	425 936
MCXT 500/1356	1121560911	8020119129227	400/3/50	F	500	1300	46	78	10	145	5,5+5,5	4+4	1000	AB678	2/2	76	2050x590x1170 80x23.1x45.6	482 1062
MCXT 500/1716	1121570912	8020119119426	400/3/50	F	500	1660	58.6	100	10	145	7,5+7,5	5,5+5,5	1280	AB858	2/2	78	2050x590x1170 80x23.1x45.6	517 1139



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

BELT DRIVEN AIR COMPRESSOR - MVX RANGE

MVX 300

The Michelin **MCXT 500** piston air compressor was designed for professionals who need a reliable belt driven compressor.

Powerful yet durable and easy to use, this range of compressors is ideal for intermittent or frequent use and for applications including inflating, blowing, cleaning, stapling, painting, nailing, misting/spraying, grouting, hammering and many more.

It is to be considered the top for reliability, silence, durability, energy efficiency and maintenance.



Drill



Screw



Grind



Inflate



Cast iron cylinder




Pressure switch with overload protection



Cooling pipes



Pressure regulator



Type	Code	EAN																	
			Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm	kg	
MVX 300/525	1121540040	8020119129845	400/3/50	F	270V	490	17.3	29,4	10	145	5,5	4	1440	AB525	2/2	76	670x1850 26x72	145 319.6	
MVX 300/598	1121550575	8020119129227	400/3/50	F	270V	600	21.1	35,9	14	203	5,5	4	1270	AB598	2/2	75	670x1850 26x72	155 341.7	
MVX 300/858	1121570311	upon request	400/3/50	F	270V	830	29.3	50	14	203	7,5	5,5	1280	AB858	2/2	76	670x1850 26x72	165 363.7	
MVX 300/858	1121570569	8020119119426	400/3/50	F	270V	830	29.3	50	14	203	7,5	5,5	1280	AB858	2/2	76	670x1850 26x72	155 341.7	

SILENT PISTON AIR COMPRESSORS



Wash



Inflate



Paint



Scratch



Drill



Screw



Grind



MICHELIN

www.michelin.com

SILENT PISTON AIR COMPRESSORS - MCX N RANGE

MCX 958 N - MCX 988 N

The Michelin MCX N piston air compressor was designed for professionals even for the most demanding thanks to its characteristics of reliability, stability and sturdiness. The Michelin MCX N compressor is ideal for frequent use and for applications including inflating, blowing, cleaning, stapling, professional painting, nailing, misting/spraying, impact bolting, sandblasting, ratcheting, drilling and many others.

A feature that makes it unique is its silence, which is why it is the most used model in all closed work environments.



Drill



Screw



Grind



Inflate



Soundproof cabinet



Control Panel



Pressure line gauge and hour counter



Type	Code	Ean Code																
			Volt/Hz	Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm	kg
MCX 958 N 10B	1121680954	8020119118795	400/3/50	F	-	830	29.3	49,8	10	145	7,5	5,6	980	AB998	2/2	66	864x591x745 34x23.3x29.3	200 440,9
MCX 958 N 14B	1121680905	8020119145180	400/3/50	F	-	830	29.3	49,8	14	203	7,5	5,6	980	AB998	2/2	66	864x591x745 34x23.3x29.3	200 440,9
MCX 988 N 10B	1121680881	8020119118801	400/3/50	F	-	910	32.2	54,6	10	145	10	7,5	1070	AB998	2/2	66	864x591x745 34x23.3x29.3	200 440,9
MCX 988 N 15B	1121720085	upon request	400/3/50	F	-	910	32.2	54,6	15	217	10	7,5	1070	AB998	2/2	66	864x591x745 34x23.3x29.3	200 440,9



MICHELIN

SILENT PISTON AIR COMPRESSORS - MCX N RANGE

MCX 958 N - MCX 988 N

The Michelin **MCX N** piston air compressor with tank has been designed for professionals even for the most demanding thanks to its characteristics of reliability, stability and sturdiness. The Michelin **MCX N** compressor is ideal for frequent use and for applications including inflating, blowing, cleaning, stapling, professional painting, nailing, misting/spraying, impact bolting, sandblasting, ratcheting, drilling and many others.

A feature that makes it unique is its silence, which is why it is the most used model in all closed work environments.

Furthermore, with the 300 or 500 liter tank, it makes continuous work perfect in terms of performance and reliability.



Drill



Screw



Grind




Inflate



Soundproof cabinet



Control Panel

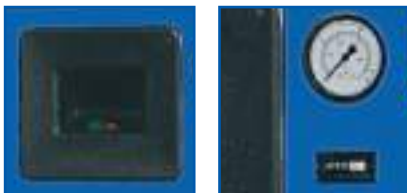

Type	Code	EAN																
			Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm	kg
MCX 598/300 N	1121680844	8020119117118	400/3/50	F	270	600	21.1	35,9	10	145	5,5	4,1	1270	AB598	2/2	69	1612x599x1264 63.5x23.6x50	180 396.8
MCX 598/300 N	1121680845	upon request	400/3/50	F	270	600	21.1	35,9	10	145	5,5	4,1	1270	AB598	2/2	69	1612x599x1264 63.5x23.6x50	220 485
MCX 598/300 N	1121730067	upon request	220/3/60	F	270	600	21.1	35,9	10	145	5,5	4,1	1270	AB598	2/2	69	1612x599x1264 63.5x23.6x50	220 485
MCX 958/300 N 10B	1121680955	8020119138236	400/3/50	F	270	600	21.1	35,9	10	145	7,5	5,6	1270	AB998	2/2	69	1612x599x1264 63.5x23.6x50	275 606.2
MCX 958/300 N	1121680784	8020119141359	400/3/50	F	270	600	21.1	35,9	10	145	7,5	5,6	1270	AB998	2/2	69	1612x599x1264 63.5x23.6x50	220 485
MCX 958/500 N	1121680956	8020119118818	400/3/50	F	500	600	21.1	35,9	10	145	7,5	5,6	1270	AB998	2/2	69	2038x600x1357 80.2x24x53.4	305 672
MCX 988/300 N	1121680831	8020119139967	400/3/50	F	270	910	32.2	54,6	10	145	10	7,5	1070	AB998	2/2	66	1612x599x1264 63.5x23.6x50	190 418.8
MCX 988/500 N	1121680958	8020119129128	400/3/50	F	500	910	32.2	54,6	10	145	10	7,5	1070	AB998	2/2	66	2040x750x1750 80.3x29.5x69	240 529



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

SILENT PISTON AIR COMPRESSORS - MCX N RANGE

MCX D 958 N - MCX D 988 N

The Michelin **MCX N** piston air compressor with tank has been designed for professionals even for the most demanding thanks to its characteristics of reliability, stability and sturdiness. The Michelin **MCX N** compressor is ideal for frequent use and for applications including inflating, blowing, cleaning, stapling, professional painting, nailing, misting/spraying, impact bolting, sandblasting, ratcheting, drilling and many others.

A feature that makes it unique is its silence, which is why it is the most used model in all closed work environments.

Furthermore, with the 300 or 500 liter tank, it makes continuous work perfect in terms of performance and reliability.

This range is equipped with a dryer; a complete station at your service.



Drill



Screw



Grind



Inflate




Soundproof cabinet



Control Panel



Con essiccatore

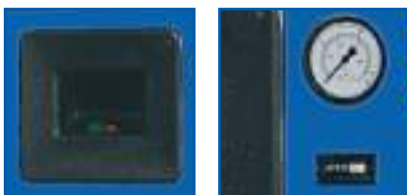

Type	Code	EAN	Volt/Hz	Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	min-1	Pump	Cil./St.	dB(A)	LxPxH mm	kg
MCXD 598/300 N	1121680904	upon request	400/3/50	F	270	600	21.1	35,9	10	145	5,5	4,1	1270	AB598	2/2	68	1440x592x1220 56.7x23x48	220 485
MCXD 598/300 N	1121680953	8020119118832	400/3/50	F	270	600	21.1	35,9	10	145	5,5	4,1	1270	AB598	2/2	68	1440x592x1220 56.7x23x48	220 485
MCXD 958/300 N	1121680960	8020119130001	400/3/50	F	270	830	29.3	49,8	10	145	7,5	5,6	980	AB998	2/2	68	1440x592x1220 56.7x23x48	275 606.2
MCXD 988/500 N	1121680959	8020119118856	400/3/50	F	270	910	32.2	54,6	10	145	10	7,5	1070	AB998	2/2	66	2000x600x1330 78.7x23.6x52.4	325 716.5

ROTARY SCREW AIR COMPRESSORS



Wash



Inflate



Paint



Scratch



Drill



Screw



Grind



ROTARY SCREW AIR COMPRESSORS - MC RANGE

MC 4 - MC 6 - M8 - MC 10

Equipped with a new generation of airend technology, the Michelin MC range represents a superior advance over piston compressors.

Screw compressor technology designed to innovate. We continue to innovate our compressed air solutions to meet the needs of businesses across all industries. Michelin's latest generation of rotary screw technology offers greater advantages than ever before in terms of running costs, sustainability, performance and reliability. Improved energy efficiency and operational performance over piston compressors make MC rotary screw compressors ideal for smaller industrial applications with high compressed air requirements, where pressure reliability is paramount.



Drill



Screw



Grind



Inflate



Soundproof cabinet



Control Panel

For industrial applications



Encapsulated screw unit



Type	Code	EAN													
			Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/ins	kg lb
MC 4	4116001029	8024900724158	F	-	444	15.7	26,4	8	116	4	3	C43i	69	750x591x675	95
MC 4	4116001031	8024900724165	F	-	352	12.4	21,1	10	145	4	3	C43i		29.5x23.2x26.5	209.4
MC 6	4116001033	8024900724219	F	-	564	19.9	33,8	8	116	6	4,5	C43i	69	750x591x675	104
MC 6-0	4116000847	8024900724226	F	-	498	17.6	29,8	10	145	6	4,5	C43i		29.5x23.2x26.5	229,8
MC 8	4116001036	8024900724271	F	-	780	27.6	46,8	8	116	8	6	C43i	70	750x591x675	104
MC 8-0	4116000849	8024900724288	F	-	726	25.7	43,5	10	145	8	6	C43i		29.5x23.2x26.5	229.2
MC 10	4116001039	8024900724356	F	-	852	30.1	51,1	8	116	10	7,5	C43i	73	750x591x675	115
MC 10	4116001041	8024900724363	F	-	840	29.7	50,4	10	145	10	7,5	C43i		29.5x23.2x26.5	253.5



MICHELIN

ROTARY SCREW AIR COMPRESSORS - MC RANGE

MC 90+90

Equipped with a new generation of airend technology, the Michelin MC range represents a superior advance over piston compressors.

Main features:

- New generation airend technology
- Market leading horsepower and Air Volume Delivered (FAD)
- Performance superior to the piston compressor
- Energy efficiency with reduced CO2 emissions
- Quiet operation compared to piston compressor
- Eco-friendly: low oil consumption and low oil contamination
- Main components without maintenance



Drill



Screw



Grind



Inflate



Soundproof cabinet



Control Panel

For industrial applications



Encapsulated screw unit



Type	Code	EAN													
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/lins	kg lb
400/3/50															
MC 4 90+90	4116000990	8024900723939	F	90+90	444	15.7	26,4	8	116	4	3	C43i	69	1021x750x1055	199
														40.1x29.5x41.5	438.7
MC 4 90+90	4116000992	8024900723946	F	90+90	352	12.4	21,1	10	145	4	3	C43i		1021x750x1055	199
														40.1x29.5x41.5	438.7
MC 6 90+90	4116000994	8024900724011	F	90+90	564	19.9	33,8	8	116	6	4,5	C43i	69	1021x750x1055	208
														40.1x29.5x41.5	458.5
MC 6 90+90	4116000996	8024900724028	F	90+90	498	17.6	29,8	10	145	6	4,5	C43i		1021x750x1055	208
														40.1x29.5x41.5	458.5
MC 8 90+90	4116000998	8024900724097	F	90+90	780	27.6	46,8	8	116	8	6	C43i	70	1173x750x1055	208
														46.1x29.5x41.5	458.5
MC 8 90+90	4116001001	8024900724103	F	90+90	726	25.7	43,5	10	145	8	6	C43i		1173x750x1055	208
														46.1x29.5x41.5	458.5



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

ROTARY SCREW AIR COMPRESSORS - MC RANGE

MC 90+90 D

Equipped with a new generation of airend technology, the Michelin MC range represents a superior advance over piston compressors.

Main features:

- New generation airend technology
- Market leading horsepower and Air Volume Delivered (FAD)
- Performance superior to the piston compressor
- Energy efficiency with reduced CO2 emissions
- Quiet operation compared to piston compressor
- Eco-friendly: low oil consumption and low oil contamination
- Main components without maintenance



Drill



Screw



Grind



Inflate



Soundproof cabinet



Control Panel

For industrial applications



Encapsulated screw unit



Type	Code	EAN													
400/3/50			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/ins	kg lb
MC 4 90+90 D	4116000922	8024900723915	F	90+90	444	15.7	26,4	8	116	4	3	C43i	69	1021x750x1055	219
															40.1x29.5x41.5
MC 4 90+90 D	4116000924	8024900723922	F	90+90	352	12.4	21,1	10	145	4	3	C43i	69	1021x750x1055	219
															40.1x29.5x41.5
MC 6 90+90 D	4116000926	8024900723991	F	90+90	564	19.9	33,8	8	116	6	4,5	C43i	69	1021x750x1055	228
															40.1x29.5x41.5
MC 6 90+90 D	4116000928	8024900724004	F	90+90	498	17.6	29,8	10	145	6	4,5	C43i	70	1021x750x1055	228
															40.1x29.5x41.5
MC 8 90+90 D	4116000930	8024900724073	F	90+90	780	27.6	46,8	8	116	8	6	C43i	70	1173x750x1055	228
															46.1x29.5x41.5
MC 8 90+90 D	4116000932	8024900724080	F	90+90	726	25.7	43,5	10	145	8	6	C43i	70	1173x750x1055	228
															46.1x29.5x41.5

ROTARY SCREW AIR COMPRESSORS - MC RANGE

MC 200 / MC 270

Equipped with a new generation of airend technology, the Michelin MC range represents a superior advance over piston compressors.

Main features:

- New generation airend technology
- Market leading horsepower and Air Volume Delivered (FAD)
- Performance superior to the piston compressor
- Energy efficiency with reduced CO2 emissions
- Quiet operation compared to piston compressor
- Eco-friendly: low oil consumption and low oil contamination
- Main components without maintenance



Drill



Screw



Grind



Inflate



Soundproof cabinet



Control Panel

For industrial applications



Encapsulated screw unit



Type	Code	EAN													
			Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/ins	kg lb
400/3/50															
MC 4 200	4116000957	8024900723090	F	200	444	15.7	26,4	8	116	4	3	C43i	69	1443x608x1117 56.8x23.9x43.9	176 388
MC 4 200	4116000959	8024900723106	F	200	352	12.4	21,1	10	145	4	3	C43i	69	1443x608x1117 56.8x23.9x43.9	176 388
MC 6 200	4116001019	8024900723212	F	200	564	19.9	33,8	8	116	6	4,5	C43i	69	1443x608x1117 56.8x23.9x43.9	185 407.8
MC 6-200	4116000848	8024900723229	F	200	498	17.6	29,8	10	145	6	4,5	C43i	69	1443x608x1117 56.8x23.9x43.9	185 407.8
MC 8 200	4116001065	8024900723335	F	200	780	27.6	46,8	8	116	8	6	C43i	70	1443x610x1118 56.8x24x44	185 407.8
MC 8 200	4116001067	8024900723342	F	200	726	25.7	43,5	10	145	8	6	C43i	70	1443x610x1118 56.8x24x44	185 407.8
MC 4 270	4116001003	8024900723458	F	270	444	15.7	26,4	8	116	4	3	C43i	69	1537x608x1171 60.5x23.9x46.1	184 405.6
MC 4 270	4116001005	8024900723465	F	270	352	12.4	21,1	10	145	4	3	C43i	69	1537x608x1171 60.5x23.9x46.1	184 405.6
MC 6 270	4116001007	8024900723571	F	270	564	19.9	33,8	8	116	6	4,5	C43i	69	1537x608x1171 60.5x23.9x46.1	193 425.4
MC 6 270	4116001009	8024900723588	F	270	498	17.6	29,8	10	145	6	4,5	C43i	69	1537x608x1171 60.5x23.9x46.1	193 425.4
MC 8 270	4116001011	8024900723694	F	270	780	27.6	46,8	8	116	8	6	C43i	70	1537x612x1171 60.5x24x46.1	193 425.4
MC 8 270	4116000551	8024900723700	F	270	726	25.7	43,5	10	145	8	6	C43i	70	1537x612x1171 60.5x24x46.1	193 425.4
MC 10 270	4116001014	8024900723854	F	270	852	30,1	51,1	8	116	10	7,5	C43i	73	1537x612x1171 60.5x24x46.1	204 449.7
MC 10 270	4116001016	8024900723861	F	270	840	29,7	50,4	10	145	10	7,5	C43i	73	1537x612x1171 60.5x24x46.1	204 449.7



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

ROTARY SCREW AIR COMPRESSORS - MC RANGE

MC 200 D / MC 270 D

Equipped with a new generation of airend technology, the Michelin MC range represents a superior advance over piston compressors.

Main features:

- New generation airend technology
- Market leading horsepower and Air Volume Delivered (FAD)
- Performance superior to the piston compressor
- Energy efficiency with reduced CO2 emissions
- Quiet operation compared to piston compressor
- Eco-friendly: low oil consumption and low oil contamination
- Main components without maintenance



Drill



Screw



Grind



Inflate



Soundproof cabinet




Control Panel

For industrial applications



Encapsulated screw unit



Type	Code	EAN													
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/ins	kg lb
MC 4 200 D	4116000949	8024900723076	F	200	444	15.7	26,4	8	116	4	3	C43i	69	1443x608x1117 56.8x23.9x43.9	196 432.1
MC 4 200 D	4116000951	8024900723083	F	200	352	12.4	21,1	10	145	4	3	C43i	69	1443x608x1117 56.8x23.9x43.9	196 432.1
MC 6 200 D	4116000983	8024900723199	F	200	564	19.9	33,8	8	116	6	4,5	C43i	69	1443x608x1117 56.8x23.9x43.9	205 451.9
MC 6 200 D	4116000985	8024900723205	F	200	498	17.6	29,8	10	145	6	4,5	C43i	69	1443x608x1117 56.8x23.9x43.9	205 451.9
MC 8 200 D	4116001026	8024900723311	F	200	780	27.6	46,8	8	116	8	6	C43i	70	1443x610x1118 56.8x24x44	205 451.9
MC 8 200 D	4116000850	8024900723328	F	200	726	25.7	43,5	10	145	8	6	C43i	70	1443x610x1118 56.8x24x44	205 451.9
MC 4 270 D	4116000934	8024900723434	F	270	444	15.7	26,4	8	116	4	3	C43i	69	1537x608x1171 60.5x23.9x46.1	204 449.7
MC 4 270 D	4116000936	8024900723441	F	270	352	12.4	21,1	10	145	4	3	C43i	69	1537x608x1171 60.5x23.9x46.1	204 449.7
MC 6 270 D	4116000938	8024900723557	F	270	564	19.9	33,8	8	116	6	4,5	C43i	69	1537x608x1171 60.5x23.9x46.1	213 469.5
MC 6 270 D	4116000940	8024900723564	F	270	498	17.6	29,8	10	145	6	4,5	C43i	69	1537x608x1171 60.5x23.9x46.1	213 469.5
MC 8 270 D	4116000942	8024900723670	F	270	780	27.6	46,8	8	116	8	6	C43i	70	1537x612x1171 60.5x24x46.1	213 469.5
MC 8 270 D	4116000944	8024900723687	F	270	726	25.7	43,5	10	145	8	6	C43i	70	1537x612x1171 60.5x24x46.1	213 469.5
MC 10 270 D	4116000946	8024900723830	F	270	852	30,1	51,1	8	116	10	7,5	C43i	73	1537x612x1171 60.5x24x46.1	224 493.8
MC 10 270 D	4116000851	8024900723847	F	270	840	29,7	50,4	10	145	10	7,5	C43i	73	1537x612x1171 60.5x24x46.1	224 493.8



MICHELIN

ROTARY SCREW AIR COMPRESSORS - RSX RANGE

RSX DR 3

The new Michelin RSX range with direct drive features:
 Superior performance and efficiency compared to belt driven piston compressors
 Quiet operation at less than 59 dB(A)
 High reliability and longevity of the group for a better management cost of the life cycle
 Resistant air net and tools, protected from corrosion and damage
 Quick, simple and economical maintenance
 Space-saving design
 Eco-friendly



Drill



Screw



Grind



Inflate



Soundproof cabinet



2 Pressure Vertical air compressors


For industrial applications



Encapsulated screw unit



Type	Code	EAN													
			Conf.	I	I/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/lins	kg lb
230/1/50															
RSX DR 3 90W	4152044052	upon request	C	90 W	280	9.9	16,8	10	145	3	2,2	C43i	59	1105x495x1085 43.5x19.5x42.7	112 247
RSX DR 3 200W	4152044053	upon request	C	200 W	280	9.9	16,8	10	145	3	2,2	C43i	59	1430x616x1268 56.3x24.2x49.9	160 353
RSX DR 3 200	4152044054	upon request	F	200	280	9.9	16,8	10	145	3	2,2	C43i	59	1430x450x1157 56.3x17.7x45.6	160 353



MICHELIN

www.michelin.com

DOL starter
 * Group performance measured at 8.5 bar in accordance with ISO1217, Annex C, latest edition
 ** Sound level measured in accordance with ISO 2151:2004 applying ISO 9614/2 (sound intensity method).
 Available version: 400/3/50 N - 230/1/60 - 230/3/60 - 230/1/60 - 230/1/60 - 230/1/60 - 230/3/60
 60 Hz available

Distributed under licence
 by FIAC Professional Air Compressors srl
 (+39) 0516786811 - www.fiac.it

ROTARY SCREW AIR COMPRESSORS - RSX RANGE

RSX 4 - RSX 20

The new Michelin RSX range features:
 New integrated block: Innovative design made of fully integrated aluminum
 Complex architecture with a minimal number of embedded components and channels
 Superior vertical oil separation
 Compactness of the integrated oil circuit
 Less risk of all types of corrosion and less risk of condensation
 Quick, simple and economical maintenance
 Simple and reliable digital Control Panel
 Low noise and low vibration
 One of the smallest footprints on the market



Drill



Screw



Grind



Inflate



Soundproof cabinet



2 Pressure Vertical air compressors



For industrial applications



Encapsulated screw unit

Type	Code	EAN													
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/ins	kg / lb
RSX4	4152040899	upon request	F	-	470	16.6	28,2	8	116	4	3	C43i	62	805x603x1020 31.7x23.7x40.1	147 324
RSX4	4152040900	upon request	F	-	362	12.8	21,7	10	145	4	3	C43i	62	805x603x1020 31.7x23.7x40.1	147 324
RSX5,5	4152040901	upon request	F	-	594	21.0	35,6	8	116	5,5	4,1	C43i	63	805x603x1020 31.7x23.7x40.1	152 335
RSX5,5	4152040902	upon request	F	-	511	18.1	30,6	10	145	5,5	4,1	C43i	63	805x603x1020 31.7x23.7x40.1	152 335
RSX10S	4152041382	upon request	F	-	1135	40.1	68,1	8	116	10	7,5	C55*i	65	938x708x1020 36.9x27.9x40.1	206 454
RSX10S	4152041383	upon request	F	-	995	35.2	59,7	10	145	10	7,5	C55*i	65	938x708x1020 36.9x27.9x40.1	206 454
RSX10S	4152041384	upon request	F	-	773	27.3	46,3	13	188	10	7,5	C55*i	65	938x708x1020 36.9x27.9x40.1	206 454
RSX15	4152041385	upon request	F	-	1610	56.9	96,6	8	116	15	11,2	C55*i	69	938x708x1020 36.9x27.9x40.1	217 478
RSX15	4152041386	upon request	F	-	1410	49.8	84,6	10	145	15	11,2	C55*i	69	938x708x1020 36.9x27.9x40.1	217 478
RSX15	4152041387	upon request	F	-	1150	40.6	69	13	188	15	11,2	C55*i	69	938x708x1020 36.9x27.9x40.1	217 478
RSX20	4152041388	upon request	F	-	1850	65.4	111	8	116	20	14,9	C55*i	71	938x708x1020 36.9x27.9x40.1	236 520
RSX20	4152041389	upon request	F	-	1677	59.3	100,62	10	145	20	14,9	C55*i	71	938x708x1020 36.9x27.9x40.1	236 520
RSX20	4152041390	upon request	F	-	1326	46.9	79,56	13	188	20	14,9	C55*i	71	938x708x1020 36.9x27.9x40.1	236 520

DOL starter

* Group performance measured in accordance with ISO1217, Annex C, latest edition

** Sound level measured in accordance with ISO 2151:2004 applying ISO 9614/2 (sound intensity method).

Available version: 230/3/50. 60 Hz available



MICHELIN

ROTARY SCREW AIR COMPRESSORS - RSX RANGE

RSX4 200 - RSX20 500

The new Michelin RSX range is characterized by:
 New integrated block: Innovative design made of fully integrated aluminum
 Complex architecture with a minimal number of embedded components and channels
 Superior vertical oil separation
 Compactness of the integrated oil circuit
 Less risk of all types of corrosion and less risk of condensation

Quick, simple maintenance and economic
 Digital Control Panel simple and reliable
 Low noise and low vibration
 One of the smallest footprints present on the market



Type	Code	EAN													
400/3/50			Conf.	I	I/min	CFM	m³/h	bar	psi	HP	kW	Pump	dB(A)	LxPxH mm/lins	kg lb
RSX4 200	4152040923	upon request	F	200	470	16.6	28,2	8	116	4	3	C43i	62	1429x573x1397 56.3x22.6x55	207 456
RSX4 200	4152040924	upon request	F	200	362	12.8	21,72	10	145	4	3	C43i	62	1429x573x1397 56.3x22.6x55	207 456
RSX5,5 200	4152040927	upon request	F	200	594	21.0	35,64	8	116	5,5	4,1	C43i	63	1429x573x1397 56.3x22.6x55	213 470
RSX5,5 200	4152040928	upon request	F	200	511	18.1	30,66	10	145	5,5	4,1	C43i	63	1429x573x1397 56.3x22.6x55	213 470
RSX4 270	4152040925	upon request	F	270	470	16.6	28,2	8	116	4	3	C43i	62	1533x573x1447 60.4x22.6x57	214 472
RSX4 270	4152040926	upon request	F	270	362	12.8	21,72	10	145	4	3	C43i	62	1533x573x1447 60.4x22.6x57	214 472
RSX5,5 270	4152040929	upon request	F	270	594	21.0	35,64	8	116	5,5	4,1	C43i	63	1533x573x1447 60.4x22.6x57	220 485
RSX5,5 270	4152040930	upon request	F	270	511	18.1	30,66	10	145	5,5	4,1	C43i	63	1533x573x1447 60.4x22.6x57	220 485
RSX10S 270	4152041409	upon request	F	270	1135	40.1	68,1	8	116	10	7,5	C55*i	67	1533x678x1447 60.4x26.7x57	274 604
RSX10S 270	4152041410	upon request	F	270	995	35.2	59,7	10	145	10	7,5	C55*i	67	1533x678x1447 60.4x26.7x57	274 604
RSX10S 270	4152041411	upon request	F	270	773	27.3	46,38	13	188	10	7,5	C55*i	67	1533x678x1447 60.4x26.7x57	303 668
RSX15 270	4152041415	upon request	F	270	1610	56.9	96,6	8	116	15	11,2	C55*i	69	1533x678x1447 60.4x26.7x57	286 631
RSX15 270	4152041416	upon request	F	270	1410	49.8	84,6	10	145	15	11,2	C55*i	69	1533x678x1447 60.4x26.7x57	286 631
RSX15 270	4152041417	upon request	F	270	1150	40.6	69	13	188	15	11,2	C55*i	69	1533x678x1447 60.4x26.7x57	315 694
RSX20 270	4152041421	upon request	F	270	1850	65.4	111	8	116	20	14,9	C55*i	71	1533x678x1447 60.4x26.7x57	305 672
RSX20 270	4152041422	upon request	F	270	1677	59.3	100,62	10	145	20	14,9	C55*i	71	1533x678x1447 60.4x26.7x57	305 672
RSX20 270	4152041423	upon request	F	270	1326	46.9	79,56	13	188	20	14,9	C55*i	71	1533x678x1447 60.4x26.7x57	334 736
RSX10S 500	4152041412	upon request	F	500	1135	40.1	68,1	8	116	10	7,5	C55*i	67	1935x678x1578 76.2x26.7x62.1	338 745
RSX10S 500	4152041413	upon request	F	500	995	35.2	59,7	10	145	10	7,5	C55*i	67	1935x678x1578 76.2x26.7x62.1	338 745
RSX10S 500	4152041414	upon request	F	500	773	27.3	46,38	13	188	10	7,5	C55*i	67	1935x678x1578 76.2x26.7x62.1	340 749
RSX15 500	4152041418	upon request	F	500	1610	56.9	96,6	8	116	15	11,2	C55*i	69	1935x678x1578 76.2x26.7x62.1	350 772
RSX15 500	4152041419	upon request	F	500	1410	49.8	84,6	10	145	15	11,2	C55*i	69	1935x678x1578 76.2x26.7x62.1	350 772
RSX15 500	4152041420	upon request	F	500	1150	40.6	69	13	188	15	11,2	C55*i	69	1935x678x1578 76.2x26.7x62.1	352 776
RSX20 500	4152041424	upon request	F	500	1850	65.4	111	8	116	20	14,9	C55*i	71	1935x678x1578 76.2x26.7x62.1	369 813
RSX20 500	4152041425	upon request	F	500	1677	59.3	100,62	10	145	20	14,9	C55*i	71	1935x678x1578 76.2x26.7x62.1	369 813
RSX20 500	4152041426	upon request	F	500	1326	46.9	79,56	13	188	20	14,9	C55*i	71	1935x678x1578 76.2x26.7x62.1	371 818




MICHELIN

www.michelin.com

* Group performance measured in accordance with ISO1217, Annex C, latest edition
 ** Sound level measured in accordance with ISO 2151:2004 applying ISO 9614/2 (sound intensity method).
 Available version: 230/3/50. 60 Hz available

Distributed under licence
 by FIAC Professional Air Compressors srl
 (+39) 0516786811 - www.fiac.it

PETROL ENGINE AIR COMPRESSOR

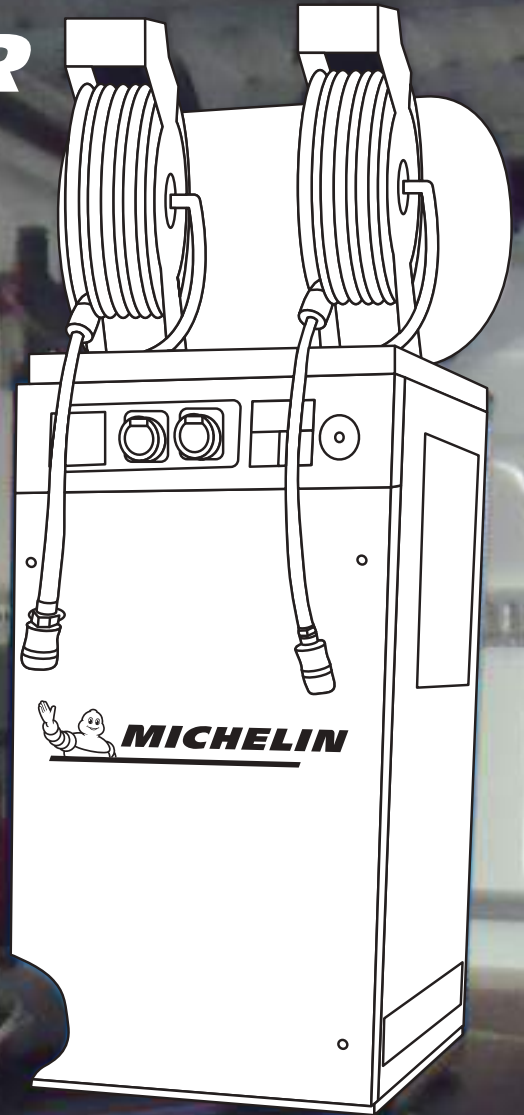

Wash



Inflate



Paint



Scratch



Drill



Screw



Grind



www.michelin.com

PETROL ENGINE AIR COMPRESSOR - S RANGE



S.100/360 - S.300/678


Air compressors with internal combustion engines, for all uses where it is not possible to have electricity. Designed with a wide track to facilitate transport, they are fitted with large knobby pneumatic wheels which facilitate movement on rough terrain. Equipped with pressure reducer/filter and for Agri models also with lubricator, they are powerful, robust, versatile, practical and easy to handle. The range is equipped with 4 - 5.5 and 9 HP Honda petrol engines, while the 5.5 and 7.5 HP Agri Diesel compressors are powered by Yanmar. On the 5.5 to 9 HP models (diesel included) a pneumatic self-regulating device is installed which accelerates the engine during the accumulation of air and decelerates it when the maximum pressure is reached. This self-regulation makes it possible to reduce the workload on the mechanical parts, the sound level, fuel consumption and gas emissions, prolonging the life of the compressor. The Agri models are designed for the use of several tools at the same time, if equipped with a reel complete with hose, they allow you to work remotely.



Pneumatics
scissor



Pneumatics
olive
agitator



Pneumatics
saw



Inflate



Universal air outlet



Pressure switch with thermal protection



Pumping unit and built-in cast iron cylinder



Ergonomic handle

Type	Code	EAN														
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	Type	min-1	Pump	Cil.	dB(A)	LxPxH mm/ins	k/ lb
S.100/360	1121440867	8020119122068	C	100	350	12.4	21	10	145	GP 160	1500	AB360	2/1	76	1100x400x850 43.3x15.7x33.5	65 143
S.200/360	1121440868	8020119122075	C	200	350	12.4	21	10	145	GP 160	1500	AB360	2/1	76	1460x460x1140 57.5x18.1x44.9	110 243
S.200/515	1121440899	8020119129869	C	200	510	18.2	30,6	10	145	GX 160	1280	AB515	2/1	76	1460x460x1140 57.5x18.1x44.9	150 331
S.300/598	1121440869	8020119122082	C	270	600	21.1	35,9	10	145	GX 160	1270	AB598	2/2	76	1600x560x1230 63x22x48.2	200 441
S.300/678	1121440887	8020119127407	C	270	650	23	39	10	145	GX 160	950	AB678	2/2	76	1600x500x1040 63x19.7x44.9	160 353

PETROL ENGINE AIR COMPRESSOR - MUX RANGE

MUX 998 N

Multifunctional service unit, integrates air compressor, power generator and diesel engine in a single Soundproof cabinet!

With:

- High performance pumping group
- Electric generator
- Water-cooled diesel engine
- Iron frame
- Chassis with anti-vibration system
- Soundproof cabinet with painted steel panels
- Electric battery for starting the engine
- Compressed air tank capacity 90 liters CE approved 13 bar
- Filter reducer / lubricator unit
- Double hose reel: a)1x \varnothing 1/2-16 m / b)1x \varnothing 3/8-21 m
- Quick air connections with safety
- Nr 1 three-phase electrical socket V. 400/50 (red) 6 kVA
- Nr 1 single-phase electrical socket V. 230/50 (blue) 2 kVA
- Control Panel / engine ignition with electric key starter
- Fuel tank (22 litres)
- External industrial filter for diesel engine easy to maintain.

LOMBARDINI
TESTED

POWERED by
LOMBARDINI



Type	Code	EAN														
			Conf.	l	l/min	CFM	m ³ /h	bar	psi	HP	min-1	Pump	Cil.	dB(A)	LxPxH mm/ins	k /lb
MUX 998 N	1121440840	8020119161647	F	90	765	27	45.9	12	174	17	900	AB998	2/2	76	810x860x1690 31.9x33.8x66.5	378 833



www.michelin.com



Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

PNEUMATIC TOOLS & ACCESSORIES





PNEUMATIC TOOLS





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Air grease pistol	1126001367	8020119068847	250-300	9-10.5		4-6	58-87





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Gun metal caulking	1126001368	8020119068830	170	6		6	87





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Orbital sander – 150mm	1126000742	8020119084670	250	9		6	87



Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Palm-grip sander with Velcro disc – 125 mm	1126000745	8020119084700	170	6		6	87



Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Angular sander – 100 mm	1126000743	8020119084687	250	9		6	87





MICHELIN



www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Case with straight grinder + 10 grinding bits	1126000741	8020119084588	150-170	5-6		6	87





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Case with air hammer/chisel + 4 chisel bits	1126001363	8020119077245	170	6		6	87





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Case with professional air hammer/chisel + 4 chisel bits	1126001364	8020119084595	170	6		6	87





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Automatic drill set	1126001370	8020119084625	170	6		6	87





Type	Code	EAN					
			l/min	CFM	m ³ /h	bar	psi
Air ratchet wrench	1126001369	8020119070659	120/160	4.2-5.7		6	87

PNEUMATIC TOOLS





Type	Code	EAN				
			l/min	CFM	m ³ /h	bar
Stapler	1126000424	8020119084632	0,5xPC	0.02	4-7	58-101





Type	Code	EAN				
			l/min	CFM	m ³ /h	bar
Stapler / Nail pistol	1126000425	8020119084649	0,4xPC	0.01	4-7	58-101



Type	Code	EAN				
			l/min	CFM	m ³ /h	bar
Pneumatic Palm Nailer	1126000744	8020119084694	0,6xPC	0.02	4-7	58-101



Type	Code	EAN				
			l/min	CFM	m ³ /h	bar
Plastering spray pistol with 5l tank	1126000740	8020119084489	250	9	4-6	58-87



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it



Type	Code	EAN				
			l/min	CFM	m³/h	bar psi
1/2" impact wrench with case + 10 sockets + accessories	1126001381	8020119070642	220	7.8	6	87



Type	Code	EAN				
			l/min	CFM	m³/h	bar psi
Professional 1/2" impact wrench with case + 10 sockets + accessories	1126001384	8020119084601	250	9	6	87



Type	Code	EAN				
Kit 49 pcs	1126000427	8020119057551				

3/8" [9,53 mm] drive air ratche
 • 3/8" [9,53 mm] square drive
 • Free speed: 160 rpm
 • 6 bar maximum working pressure

1/2" [12,7 mm] drive air impact wrench
 • Rubber bumpers to protect tool and work piece
 • Ergonomic cushion grip handle
 • One handed forward and revers mechanism
 • Free speed: 7,000 rpm
 • 6 bar maximum working pressure

150 mm air hammer
 • 4,500 blows per minute
 • 6 bar maximum working pressure
 • cushion grip handle

Metal blow inflating pistol
 • Tyres inflation
 • Football inflaion
 • Beach toys inflation
 • Blow cleaning

ACCESSORIES



Type	Cod. Blister	EAN
4 chisels kit *	1126001366	8020119078525

* Chisels cylindrical connection steel



Type	Cod. Blister	EAN
3 disks for angle sander/grinder	1126001360	8020119090497



Type	Cod. Blister	EAN	Pz.	mm
Staples	1126001378	8020119095041	1.050	15 mm
	1120008992	8020119095058	1.050	20 mm
	1120008993	8020119095065	1.050	25 mm
	1126001379	8020119095072	1.050	30 mm



Type	Cod. Blister	EAN	Pz.	mm
Nails	1126001373	8020119095003	1.000	15 mm
	1126001374	8020119095010	1.000	20 mm
	1126001375	8020119095027	1.000	25 mm
	1126001376	8020119095034	1.000	30 mm



	Cod. Blister	EAN	Inlets	Outlets	bar	psi
Pneumatic tools lubricator (M - F)	1126001361	8020119067581	1/4"M	1/4"F	8÷12	116÷174



	Cod. Blister	EAN	Pz.
Pneumatic hammer retaining spring	1126001365	8020119078518	1



Type	Cod. Blister	EAN	Pz.	FFF	FMF
"Y" joint (FFF)	240/2	1126001475	8020119046685	1	1/4"



"Y" joint (FMF)	245/2	1126001476	8020119091838	1	1/4"
-----------------	-------	------------	---------------	---	------



"T" joint (FFF)	258/2	1126001477	8020119097052	1	1/4"
-----------------	-------	------------	---------------	---	------



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it



	Type	Cod. Blister	EAN	Pz.	M	F
Cylindrical thread reducer (M - F)	270/3	1126001481	8020119063330	1	3/8"	1/4"
	270/4	1126001479	8020119069073	1	1/2"	1/8"
	270/5	1126001478	8020119063323	1	1/2"	1/4"
	270/6	1126001480	8020119067314	1	1/2"	3/8"



	Type	Cod. Blister	EAN	Pz.	M	F
Cylindrical thread reducer (M - F)	275/2	1126001482	8020119067291	1	1/8"	1/4"
	275/6	1126001482	8020119067291	1	1/4"	1/8"



	Type	Cod. Blister	EAN	Pz.	M	F
Cylindrical thread connector (F - F)	280/5	1126001483	8020119096321	1	1/4"	1/4"
	280/8	1120009067	8020119069233	1	3/8"	3/8"



	Type	Cod. Blister	EAN	Pz.	M	M
Cylindrical thread nipple (M - M)	290/5	1126001484	8020119063347	1	1/4"	1/4"
	290/8	1126001485	a richiesta	1	3/8"	3/8"



	Type	Cod. Blister	EAN	Pz.	F
Milled nut (F)	340/1	1126001486	8020119063361	1	1/4"



	Tipo	Cod. Blister	EAN	Pz.	M
Linear joint with milled nuts (M)	350	1126001488	8020119091869	1	1/4"



	Type	Cod. Blister	EAN	Pz.	M	Ø mm	Ø ins
Joint tail fitting (M)	370/1	1126001495	8020119091883	1	1/4"	6	0,24"



	Type	Cod. Blister	EAN	Pz.	M	Ø mm	Ø ins
Bayonet joint with tail fitting	365/1	1126001492	a richiesta	1	1/4"		



	Type	Cod. Blister	EAN	Pz.	M	Ø mm	Ø ins
Male threaded bayonet joint (M)	390/1	1126001497	8020119063453	1	1/4"		



ACCESSORIES



Type	Cod. Blister	EAN	Pz.	Ø mm	Ø ins
Universal snap coupling with joint tail fitting for PVC and POLYURETHANE hose	456/1	1126001322	8020119063545	1 UNIV.	6 0,24"
	456/2	1126001323	8020119063552	1 UNIV.	8 0,31"
	456/3	1126001324	8020119069844	1 UNIV.	10 0,39"



Type	Cod. Blister	EAN	Pz.	M	Ø mm	Ø ins
Universal snap coupling with spring for RILSAN hose	457/1	1126001325	8020119063569	1 UNIV.	8x6	0,31"x0,24"



Type	Cod. Blister	EAN	Pz.	Ø mm	Ø ins
Universal snap coupling with female threaded joint	459/1	1126001512	8020119063576	1 UNIV.	1/4"
	459/2	1126001513	8020119063583	1 UNIV.	3/8"



Type	Cod. Blister	EAN	Pz.	Ø mm	Ø ins
Snap coupling with hose tail fitting	445/2	1126001500	8020119069912	1 D	6 0,24"
	445/4	1126001501	8020119069936	1 D	8 0,31"



Type	Cod. Blister	EAN	Pz.	Ø mm	Ø ins
Snap coupling with bayonet joint	457/1	1126001312	8020119063484	1 I	



Type	Cod. Blister	EAN	Pz.	Ø mm	Ø ins
Snap coupling with joint for RILSAN hose	44 7/1	1126001313	8020119063491	1 I	8x6 0,31"x0,24"



Type	Cod. Blister	EAN	Pz.	F	M
Universal snap coupling with female threaded joint	459/3	1126001511	8020119007693	1 UNIV.	1/2"



Universal snap coupling with male threaded joint	460/2	1126001516	8020119063606	1 UNIV.	3/8"
--	-------	------------	---------------	---------	------



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it



	Type	Cod. Blister	EAN	Pz.	F
Snap coupling with female threaded joint	449/1	1126001317	8020119063507	1	I 1/4"
	449/2	1126001504	8020119067239	1	D 1/4"
	449/7	1126001505	8020119066218	1	D 3/8"



	Type	Cod. Blister	EAN	Pz.	M
Snap coupling with male threaded joint	450/2	1126001506	8020119067215	1	D 1/4"
	450/7	1126001507	8020119067222	1	D 3/8"



	Type	Cod. Blister	EAN	Pz.
8 pcs set, of universal quick-release fittings	460/4	1126001332	8020119084496	1



	Cod. Blister	EAN	Pz.
6 Hose clamps 6-11 / 8-13	1126001490	8020119084403	6



	Cod. Blister	EAN	Pz.
4 Hose clamps	1126001491	8020119084410	4



	Cod. Blister	EAN	Pz.
Teflon tape	1126001471	8020119084427	1



	Cod. Blister	EAN	Pz.
Adhesive sealant for fittings	1126000739	8020119084366	1



490/1 490

	Type	Cod. Blister	EAN	Pz.	M
Drain valve (M) unremovable plug (art. 490 only)	490/1	1126001518	8020119063613	1	1/4"



ACCESSORIES



Type	Cod. Blister	EAN	Pz.	FM
Line valve with P.T.F.E. sealing ring (FM)	492/2	1120008961	8020119070062	1 3/8"



Type	Cod. Blister	EAN	Pz.	FF
Line ball valve (FF)	495/2	1126001345	8020119070086	1 3/8"



Type	Cod. Blister	EAN	Pz.	M
Line valve with milled nut (M)	499/2	1126001522	8020119063637	1 1/4"



Type	Cod. Blister	EAN	Pz.	M	Ø mm	Ø ins
Pre-set safety valve sealed by means of a plastic cap (M)	570/1	1126001526	upon request	1	1	1/4" 8,5
	570/2	1126001527	8020119070130	1	1	1/4" 10,5
	570/3	1126001528	8020119135259	1	1	3/8" 12



Type	Cod. Blister	EAN	Pz.	Fasi	Inlets
Pressure switch with built-in START valve	871/1	1126001358	8020119063675	1	1 4x1/4"



Type	Cod. Blister	EAN	Pz.	l/min	C.F.M.	m³/h	Inlets	Outlets	bar	psi
Pressure regulator with gauge and line valve	970	1126001436	8020119063835	1	180	6.4	10,8	1/4"F	UNIV	0÷12 0÷174



Pressure regulator with pressure gauge and 2 line valves bayonet joint	950/1	1126001435	8020119063828	1	180	6.4	10,8	3/8"M	2xUNIV	0÷12 0÷174
--	-------	------------	---------------	---	-----	-----	------	-------	--------	------------



Filter with semi-automatic condensate drainage unit. (20 micron filtration level)	919/11	1126001433	8020119070178	1				1/4"F	1/4"F	
---	--------	------------	---------------	---	--	--	--	-------	-------	--



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it



Type	Cod. Blister	EAN	Pz.	Punto di rugiada	Inlets	Outlets
Nebulizzatore d'olio	929/11	1126001332	8020119084496	1	42 c.c.	1/4"F 1/4"F



Type	Cod. Blister	EAN	Pz.	bar	psi	
Manometro Ø 50 con raccordo posteriore (M)	780	1126001356	8020119063651	1	1/4" 0+16	0+232



Type	Cod. Blister	EAN	Pz.	bar	psi	
Manometro Ø 40 con raccordo posteriore (M)	790	1126001357	8020119063668	1	1/8" 0+12	0+174



Type	Cod. Blister	EAN	Pz.	Ø mm	Ø ins	L m.	L feet	bar	psi	
Tubo spirale completo di raccordi a baionetta o universali	1140/36	1126001395	8020119063699	1	UNIV 6x8	0,24"x0,31"	10	33	29	420
	1140/38	1126001396	8020119063705	1	UNIV 6x8	0,24"x0,31"	20	66	29	420



Type	Cod. Blister	EAN	Ø mm	Ø ins	F	L m.	L feet	bar	psi	
Arrotolatore carterato "Compact"	2253/1	1126000737	8020119048078	6x10	0,24"x0,39	1/4"	10	33	12	174



Type	Cod. Blister	EAN	Ø mm	Ø ins	F	L m.	L feet	bar	psi	
Avvolgitubo automatico	2253/2	1126000738	8020119084519	8x12	0,31"x0,47	1/4"	10	33	12	174



ACCESSORIES



Tubo PVC retinato in matasse da
10 / 20 mt. con raccordi premontati
2F 1/4"

Type	Cod. Blister	EAN	ø mm	ø ins	bar	psi
1131/1 mt. 10	1126001388	8020119070208	8x13	0,31"x0,51"	20	290
1131/2 mt. 20	1126001389	8020119070215	10x17	0,39"x0,66"	20	290



Tubo PVC retinato in matasse da
7,5/10/20 mt. con raccordi
premontati universali

1131/5 mt. 7,5	1126001386	8020119084465	6x11	0,24"x0,43"	20	290
1131/3 mt. 10	1126001387	8020119067628	8x13	0,31"x0,47"	20	290
1131/4 mt. 20	1126001390	8020119067635	8x13	0,31"x0,47"	20	290



Tubo PVC retinato in matasse da
20 mt. con raccordi
premontati universali

1131/6 mt. 20	1126001391	8020119084472	10X17	0,39"x0,66"	20	290
---------------	------------	---------------	-------	-------------	----	-----



Pistola di soffiaggio standard

Type	Cod. Blister	EAN	Pz.
1150/1	1126001055	8020119046173	1



Pistola di soffiaggio in nylon
professionale a canna curva

1151	1126001399	8020119063729	1
------	------------	---------------	---



Pistola di soffiaggio a canna lunga

1160	1126001400	8020119063736	1
------	------------	---------------	---



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it

	Type	Cod. Blister	EAN	Pz.	bar	psi
	1540	1126001408	8020119067574	1	8÷12	116÷174
Sandblasting pistol with dip tube		ricambio	EAN	Pz.	ø	
		1126001407	8020119084533	1	6	
	1170/2	1126001401	8020119063743	1	0÷12	0÷174
Pressure gauge						
	1180/1	1126001065	8020119046159	1	0÷12	0÷174
Inflating pistol with double scale pressure gauge						
	1186	1126001070	8020119052464	1	0÷12	0÷174
Inflating pistol with "CE" FRANCE pressure gauge						
	1110	1126001385	8020119063682	1		
Inflating nozzle for car tyres						
	1189	1126001472	8020119046135	3		
Inflating nozzle kit including: inflating nozzle for bicycle tyres, inflating nozzle for footballs, blowing / inflating nozzle for dinghys.						
	1870	1126001431	8020119084434	5	0÷12	0÷174
Kit of 3 accessories (5-m hose + inflation pistol + set of nozzles)						

ACCESSORIES

	Type	Cod. Blister	EAN	Pz.
 <p>Air Kit: inflating pistol with pressure gauge, spiral hose 5 m, head inflating bikes, aug inflating balloons, head inflating dinghy</p>	1870/U	1126001430	8020119080290	5
 <p>Air Kit: inflating pistol with pressure gauge, spiral hose 5 m, blow pistol</p>	1870/1	1126000709	8020119088579	3
 <p>Air/water pistol</p>	1460/1	1126001405	8020119063750	1
 <p>Washing pistol</p>	1450	1126001079	8020119048061	1
 <p>Painting kit</p>	1869/8	1126001428	8020119064863	1
 <p>Sand-blasting pistol with 2.2 lb. suction cup</p>	1540	1126001406	8020119063767	1



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it



Pistola antirombo
con cartuccia (nero)

Type	Cod. Blister	EAN	Pz.
------	--------------	-----	-----

1550	1126001409	8020119084724	2
------	------------	---------------	---



Acoustic insulator spray
cartridge (black)

1551	1126000746	8020119084731	1
------	------------	---------------	---



Mini gravity feed paint spray pistol with 120
cm³ paint cup: Air flow adjustment, paint flow
adjustment, round and fan
pattern spray

Type	Cod. Blister	EAN	∅ ugello
------	--------------	-----	-------------

1810	1126001414	8020119084540	1
------	------------	---------------	---



Ricambio	EAN	Pz.	nozzle ∅ ugello
1126001415	8020119084557	3	1



Spray pistol with bayonet lock suction cup:
Air flow adjustment, paint flow adjustment,
cup capacity: 2.2 lb., round and fan pattern
spray

1850/2	1126001087	8020119046180	1,5
--------	------------	---------------	-----

Ricambio	EAN	Pz.	nozzle ∅ ugello
1126001418	8020119067659	1	1,5
1126001419	8020119063781	1	1,8



Spray pistol with clamp type suction cup:
Air flow adjustment, paint flow adjustment,
cup capacity: 2.2 lb., round and fan pattern
spray

1851/2	1126001416	8020119063774	1,5
--------	------------	---------------	-----

Ricambio	EAN	Pz.	nozzle ∅ ugello
1126001418	8020119067659	1	1,5
1126001419	8020119063781	1	1,8



Spray pistol with gravity cup: Air flow
adjustment, paint flow adjustment,
cup capacity: 1.1 lb., round and fan pattern
spray

1852/2	1126001422	8020119063811	1,5
--------	------------	---------------	-----

Ricambio	EAN	Pz.	nozzle ∅ ugello
1126001418	8020119067659	1	1,5
1126001419	8020119063781	1	1,8



ACCESSORIES



Type	Cod. Blister	EAN	Ø ugello
1856/2	1126001426	8020119070246	1,5

Spray pistol with gravity cup: Air flow adjustment, paint flow adjustment, cup capacity: 1.1 lb., round and fan pattern spray



620	1126001411	8020119084342	
-----	------------	---------------	--

Paint spray pistol kit with air hose



620/1	1126001412	8020119084359	
-------	------------	---------------	--

2 Paint cups for paint spray pistol



290	1126001402	8020119084380	
-----	------------	---------------	--

Twin filter respirator, just for painting*



Ricambio	EAN	Pz.
1126001403	8020119084397	2

* Protection rating A1 pursuant to standard EN141



Type	Cod.	EAN
Air Kit Bag	1126002452	8020119135013



Type	Cod.	EAN
Air Kit 1878*	1126000726	8020119046111
Display case 25 x 1878	1126000844	8020119078860

* Inflation pistol, blow pistol, spray pistol, washing pistol, spiral hose (3m)



MICHELIN

www.michelin.com

Distributed under licence
by FIAC Professional Air Compressors srl
(+39) 0516786811 - www.fiac.it



Complete display in composed of	Art. no.	Pz.
Painting kit	1126001428	3
Recoil hose complete with universal couplings 10 mt	1126001395	3
Spray pistol with bayonet lock suction cup	1126001087	3
Spray pistol with gravity cup	1126001422	3
Sand-blasting pistol with suction cup	1126001408	3
Professional blowing pistol	1126001399	5
Inflation pistol with double scale pressure gauge	1126001065	5
Air/water pistol	1126001405	5
Blowing pistol	1126001055	5
Pressure regulator with gauge and line valve	1126001435	3
Pressure gauge	1126001401	5
Long nozzle blowing pistol	1126001400	5
Universal snap coupling with male threaded joint	1126001515	5
Snap coupling with female threaded joint	1126001504	5
Universal snap coupling with female threaded	1126001512	5
Snap coupling with male threaded joint	1126001506	5
Snap coupling with milled nut	1126001499	5
Snap coupling with bayonet joint	1126001503	5
Inflating nozzle	1126001470	5
Inflating nozzle kit including	1126001472	5
Kit 5 pcs.	1126000726	4
Kit 49 pcs.	1126000427	2

CONTRACT FOR THE SUPPLY OF PRODUCTS, SERVICES AND DELIVERY TERMS

1. Subject matter

This Contract (the "Contract") sets out the conditions governing purchases of products ("Products") or maintenance services ("Maintenance services") by the customer (the "Customer") from Fiac Professional Air Compressors S.r.l. FIAC ("FIAC"). FIAC and the Customer are referred individually as a "Party" and jointly as the "Parties".

2. Order and Conclusion of the Contract

- a) Purchases of Products and Services will be formalized in a purchase order (the "Order") transmitted by the Customer to FIAC and containing the specifications of the Products and Services purchased as previously agreed upon with FIAC. The Order is binding and cannot be revoked or modified without the consent of FIAC, except for the provision arising out of lett. g) of this article.
- b) Before placing the Order, the Customer has evaluated the characteristics of the requested Products and Services and verified that they are fit for the Customer's operational needs.
- c) The Order will be transmitted by the Customer to FIAC via email to the address notified to the Customer by the representative, agent or person in charge of FIAC and will become final upon confirmation by FIAC.
- d) The Order will be subject to the conditions set forth herein. Once it is confirmed by FIAC to the Customer it will be valid as a written contract, with the same substantive and probative value under DPR [Decree of the Italian President of the Republic] 513/97 and the relevant conclusion is governed by articles 1326,1334,1335 of the Italian Civil Code.
- e) The recitals and attachments, the order, the invoices and all documents, even not actually attached to the Contract, which are referred to therein, are an integral part of this Contract and have contractual value for all effects and purposes.
- f) The Parties mutually acknowledge that before stipulating this Contract, they have discussed the business offer and the conditions of this Contract, which has been the object of negotiations between the Parties and is not, therefore, subject to the provisions under arts. 1341 and 1342 of the Italian Civil Code.
- g) The Customer is entitled to cancel an Order until midnight of the third day following the receipt of the written confirmation by FIAC. In case of cancellation according to this paragraph, the Customer shall pay a cancellation fee amounting to 10% of the purchase price indicated in the Order, by wire transfer within 7 working days following the receipt of the written notice of cancellation by FIAC. The cancellation of the Order shall be effective at the time when the bank account of the Company is credited with the cancellation fee.
- h) The Customer acknowledges that advertising, campaign and promotional materials, such as advertising leaflets, catalogues, pictures, illustrations and data, only provide a general overview of the Products.
- i) FIAC reserves the right to change the design, appearance, look or shape of the goods before the delivery date, without prejudice to the fact that the goods must be able to perform their original function after the change and be suitable for the intended use. FIAC maintains its ownership and copyrights without restriction to catalogues, illustrations and other documentation provided by FIAC. The Customer shall have the right to use, translate, copy and reproduce the documentation provided by FIAC strictly for its marketing needs or for the needs of its end-users, under condition to follow and adhere to guidelines provided by FIAC.

3. Considerations and Payments

- a) The Customer shall pay FIAC the considerations indicated in the Order. The considerations are net V.A.T. and any other applicable taxes or duties.
- b) The Customer's payment obligation shall be fulfilled in the currency specified in the Order unless the Parties agree otherwise in writing.
- c) Payments from the Customer must be received directly by FIAC, in accordance with the terms and conditions agreed in the Order. Except where otherwise provided in the Order, payments shall be made upon signing the Contract. Any complaint on invoices must be notified in writing within 10 days of the date of receipt under penalty of forfeiture.
- d) The Customer's payment obligation is met at the time when the relevant amount has been credited to the Company's bank account.
- e) In case of non-payment or late payment, the Customer shall pay FIAC default interest as per D.Lgs [Legislative Decree] 231/2002, starting from the due date. FIAC, moreover, reserves the right, without prejudice to all available legal remedies, to suspend or terminate the Contract with immediate effect, stopping any ongoing supply to the Customer and retaining all amounts already received, as compensation for the unpaid amounts. All responsibility of FIAC is excluded and the right to compensation of any further damages caused by the Customer's default remains unprejudiced. g) If FIAC grants extensions of the agreed payment terms, in no event such extensions and/or renewals shall amount to novation of the contractual relationship or waiver of the claims of FIAC.
- f) Payments may not be delayed, decreased or suspended even in case of machinery failures, including machinery that is still under warranty, or of a dispute or complaint. The Customer cannot set conditions for the fulfillment of its payment obligations, further to those agreed in the Contract. Payments will be allocated in accordance with arts. 1193 and 1194 of the Italian Civil Code.
- g) In instalment sales, in case of termination of the contract, FIAC will retain all instalments and advance payments collected, as fee for the right of use or as indemnity, reserving the right to claim further damages, and without prejudice to the provisions regarding sales with a title retention clause. The Customer undertakes to keep FIAC constantly informed of the place where the materials subject to title retention are kept.

4. Delivery, Returns, Testing and Documents

- a) Any dates indicated for the delivery of the Products or the supply of the Maintenance Services is to be considered indicative and not binding for FIAC, which will not be held liable under any circumstance for any damages whatsoever occurring as a result of delivery after indicated date. The place of delivery is the place (site) indicated by the Customer in writing (contract, order, etc.)
- b) Incoterms applicable to the delivery are agreed in writing between Parties and reflected in the Order Confirmation provided by FIAC in writing. If the Products are delivered EXW (Ex-works), the transport means will be selected by Customer at its sole discretion and the transport will be at the cost of the Customer.
- c) If the carrier has been selected by the Customer or the Products have been collected by the Customer or by a carrier of the same, the Products travel at the risk of the Customer. The Customer shall be fully liable for any damage to the Products or to third parties caused by the carrier and shall hold FIAC harmless from any liability even under D.Lgs. 286/2005 and subsequent amendments and additions as well as, for international transport, under the Convention on the contract for the international carriage of goods by road (CMR).
- d) If the Customer fails to provide FIAC with the instructions required for the delivery or requested by FIAC or does not accept the goods consignment in accordance with the terms of the contract, it shall bear all costs incurred by FIAC as a result of such omission, including the costs of storage. The reimbursement of these costs and expenses shall become due immediately following FIAC's notice. However, this shall not exempt the Customer from their performance obligation, i.e. they are obligated to take delivery of the goods and pay the cost thereof to FIAC. In such a case, FIAC is entitled to claim reimbursement of costs and damages incurred as a result of customer default and delay.
- e) Upon receipt or delivery of the Products, the Customer must check them and verify that they conform to the Order placed in terms of quantity and quality. Any complaint must be filed in writing within 8 days, under penalty of forfeiture.
- f) All FIAC products are verified and tested before shipment; any off-site pre-shipment tests or inspections must be expressly requested by the Customer when placing the order. All the relevant costs will be borne by the Customer.
- g) FIAC is not obligated to accept delivery of goods returned by the Customer without a valid reason which has been specified in the Order, unless the Parties have previously agreed in writing thereof. In such cases, all costs related to the return and acceptance of the goods are borne by the Customer.

5. Special conditions concerning the export of goods to non-EU areas.

- In the event that FIAC sells to a Customer located outside European Union (hereinafter: 'non-EU areas'), the following conditions shall apply:
- a) FIAC shall not be liable for any duty, import surcharge, compensatory supplement, transit fee, transit duty, customs duty, export license, certificate of origin cost or consular fee applied for the export of goods to non-EU areas, the cost of which shall be borne exclusively by the Customer.
- b) In the event that FIAC pays for such costs incurred during export in the name of the Customer, FIAC shall be entitled to claim reimbursement of such costs from the Customer.
- c) FIAC is entitled to demand the payment of the appropriate amount or the full purchase price as advance payment of export costs for non-EU area exports or delay the delivery of goods until the amount of the appropriate advance or the full purchase price has been credited to the FIAC's bank account.

5. Liability

Without prejudice to the provisions of art. 9, and within the limits permitted by art. 1229 of the Italian Civil Code, the liability of FIAC for damages caused to the Customer in consequence of failures or malfunctioning of the Product will be limited to the loss incurred up to the value of the Order, the performance or non-performance of which has resulted in the damage. FIAC will not be liable for loss of profit. FIAC will not be liable in any way for indirect damages.

6. Force Majeure

- a) Should an act of God or force majeure event occur, which prevent FIAC from performing its obligations under this Contract, such as shortage of raw materials or power due to wars or natural disasters, failures in the machinery, strikes or lock-ups, accidents, interruptions of work, interruptions of railway services and/or any other reason outside the control of the parties that paralyzes or limits or however hinders the works in FIAC's production plants and the arrival of materials ordered from abroad, the date set for the delivery will be extended and the Customer waives any indemnity and/or compensation of damages on any grounds whatsoever. Should the delay exceed 30 days, either Party may withdraw from the Contract by means of a written notice sent to the other Party, without any liability of FIAC.
- b) If the Customer is unable to fulfill its obligations under Service/Maintenance Contract, it shall compensate FIAC for all costs that the latter has sustained for the supply of technical assistance.

7. Safety

- a) FIAC undertakes to duly fulfill all obligations under the applicable legislation with regard to the safety of its own employees and the workplace hygiene conditions (as per D. Lgs. 81/2008 on the "Protection of health and safety in the workplace"). In particular FIAC undertakes to strictly comply and make sure that its employees comply with all accident prevention and occupational hygiene legislation and to use, in performing the services under this agreement, equipment and materials conforming to all accident prevention and occupational hygiene legislation.
- b) The Customer has an obligation (under art. 26, D. Lgs. 81/2008 on "Protection of health and safety in the workplace") to provide detailed information to the staff of FIAC carrying out the works with regard to



MICHELIN

www.michelin.com

any specific risks, as well as to the prevention and emergency measures adopted in the place where the works are to be performed, and the necessary supervision during the performance of the works ordered.

8. Term and Termination

8.1 General Rule

FIAC may terminate the Contract with immediate effect upon a prior written notice sent to the Customer in any case of:

- a) Late payments as described in art. 3 f);
- b) Changes in the intended use of the Product and/or use not conforming to the instructions for use;
- c) In the cases indicated in article 1461 of the Italian Civil Code and whenever it becomes aware of circumstances that put in question the Customer's solvency and the payment of the price or consideration within the agreed dates; and
- d) In any event, in case of non-compliance by the Customer with its obligations under the Order and the Contract, when such non-compliance is capable of remedy, if the non-compliance is not remedied within 30 days after a notice to remedy is given by FIAC.

8.2 Maintenance Services

a) As regards the Maintenance Services, the term of the Contract will be as specified in the Order. FIAC may withdraw at any time upon a written notice sent to the Customer at least 30 days in advance.

b) Specifically with regard to the Maintenance Services, in addition to what is provided in the preceding articles, FIAC may terminate the Contract, effective immediately, in case of:

- i. Use of the Product for a number of hours exceeding by 10% those stated in the order.
- ii. Failures or malfunctioning of the unit caused by unforeseeable events, such as natural disasters, riots, commotion, vandalism, sabotage, events due to ice formation, fire, etc.;
- iii. Interruption of or non-compliance with the quality and quantity characteristics specified by FIAC for the "utilities", namely for power, cooling water, air;
- iv. Micro interruptions in supply voltage;
- v. Non-compliance with the environmental and operating conditions specified by FIAC;
- vi. Changes in the Product and/or the installation;
- vii. Transfer of the unit to a place other than that indicated in the Contract;
- viii. Damages accidentally or intentionally caused to the Product by the Customer or by third parties.
- ix. Use of non-original parts and/or consumable
- x. tampering by customer or third party not expressly authorized by FIAC

c) Again with regard to the Maintenance Services, in case of early termination of the contract for any reason through no fault of FIAC, except for withdrawal in cases under art. 9.2 (a) above, the Customer shall pay a penalty equal to 75 % of the residual fees due until the date of expiration of the Contract, always without prejudice to the right to claim any further damages.

9. Warranties

a) Unless otherwise specified in the Order, FIAC warrants:

- Products directly manufactured by it for a period of 12 months of the start-up of the Product (commissioning) and however not more than 15 months of the delivery; the date of commissioning shall be proved by a technical report and performed by authorized personnel. If the date cannot be proven the warranty starts from the invoice date. If the commissioning has been performed by unauthorized personnel – as reported in the manual – the warranty will be null and void;
- Spare parts of Products purchased in accordance with this Contract for a period of 6 months of their installation and however not more than 12 months of the delivery;
- Repair of parts or replaced Products for a period of 6 months of the restoration of the Product under warranty.

b) The above warranty covers only the repair or replacement, in the workshops of FIAC or authorized service centers, of materials in which manufacturing defects are found within the periods indicated above. The technicians of FIAC are solely responsible for verifying the defects. The materials must be sent to the authorized workshop indicated by FIAC, under the care and at the cost of the Customer. In such cases, the Customer will not be entitled to claim compensation for any damages resulting from the non-use of the materials.

c) The warranty is provided on condition that the Customer is up-to-date with payments.

d) The warranty does not cover those parts, which, by their nature or use, are subject to wear and tear or deterioration, and in particular those parts that are to be replaced on a regular basis.

e) The warranty does not cover damages caused by improper use and neglect of the Products.

f) The warranty expires for any Products repaired, modified or just disassembled, even partially, outside the workshops indicated by FIAC, as well as for any Products for which the instructions for use have not been complied with. No compensation or indemnity will be due by FIAC for repairs performed by unauthorized third parties at the request of the Customer during the warranty period.

10. Maintenance Services

This article will apply if the Order concerns Maintenance Services.

a) FIAC will inform the Customer of the day/s planned for the visit. The Customer will make sure that the products that are the object of the Maintenance Services be made available in full safety on the day/s planned for the assistance operations under the Contract. The operations of the technical staff of FIAC must take place in full safety during normal work hours (8:30 am to 5:30 pm, Monday to Friday), unless otherwise agreed in writing in the Contract.

b) FIAC will have free and full access to the Products to perform the operations under this agreement. Any cost and expense as FIAC may incur due to access restrictions will be borne by the Customer and invoiced separately. Any additional cost due to performance of assistance operations outside the hours indicated above or to unavailability of the unit/s will be borne by the Customer and invoiced separately.

c) The Customer shall immediately inform FIAC in any case of: a) malfunctioning such as abnormal sound, leakage and any other event that may forewarn of a possible failure in the unit/s and in the alerts given by the machine control system; b) malfunctions in the electronic control panel.

d) The Customer undertakes to provide, under its care and at its cost, in full compliance with the applicable legislation on insurance, social security and accident prevention, the support staff, lifting means and facilities, lighting and any other assistance that FIAC may need for the performance of the operations under this agreement. Any cost and expense as FIAC may incur due to delay in or lack of assistance will be borne by the Customer and invoiced separately.

e) The Customer confirms that the user manual and all original documents relating to the Products are in its possession, and declares that it knows their contents in full. The Customer undertakes to strictly comply with all parts of the indications and provisions of such documents, including those contained in this Contract.

11. Applicable Law and Resolution of Disputes

a) This Contract shall be construed (both as to validity and performance) and enforced in accordance with, and governed by, the laws of Italy.

b) The jurisdiction to decide all disputes arising from this contract, including those relevant to its validity, interpretation, performance and termination, is regulated by the following provisions:

- when the Customer has its main place of business in Italy, the exclusive jurisdiction will lie with the Court of Bologna. Such jurisdiction will also apply when the Customer has moved its offices abroad after the signing of the Contract;
 - when the Customer has its main place of business abroad, all disputes will be resolved by arbitration in accordance with the Rules of the National and International Arbitration Chamber of Milan. The Arbitration Panel will consist of three Arbitrators; two of whom will be appointed by the parties, one each, and the third one, who will act as President, by agreement of the first two arbitrators or, if no such agreement is reached, by the Arbitration Chamber. The Panel will decide in accordance with the law. The arbitration will be held in Milan. The language of the arbitration will be Italian and/or English;
 - if a foreign Customer moves its offices to Italy after the signing of the Contract, the exclusive jurisdiction will lie with the Court of Bologna.
- c) Any waiver by FIAC to enforce its rights in case of a breach by the Customer of any part of this agreement shall not be interpreted in any way as a waiver to enforce its rights regarding any subsequent breach of the same or of any other part of the agreement.

12. Traceability Obligations

For the effects and purposes of D.L. [Decree-Law] 196/03 and subsequent amendments, and of the European Regulation 2016/679 the parties mutually acknowledge that, if the conclusion or execution of the contract involves the processing of personal data, these data will be processed in compliance with the current data protection legislation for the sole purposes related to the execution of this contract or to comply with legal obligations.

13. Privacy

For the effects and purposes of D.L. [Decree-Law] 196/03 and subsequent amendments, and of the European Regulation 2016/679 the parties mutually acknowledge that, if the conclusion or execution of the contract involves the processing of personal data, these data will be processed in compliance with the current data protection legislation for the sole purposes related to the execution of this contract or to comply with legal obligations.

14. Business Code of Practice

FIAC requests that the Customer accept and comply with FIAC's Business Code of Practice, available on the website www.fiac.it. In particular, the Customer undertakes not to engage, even through its own persons in charge, collaborators and consultants, in conducts amounting to breaches of the D.Lgs. 231 of 8 June 2001 "Regulating the administrative liability of legal persons, Companies and Associations, even without legal personality" and the Italian Criminal Code, such as, without limitation: (i) corruption of public officers and private-to-private corruption, or other conducts however aimed at obtaining undue advantages from public authorities or agencies, public officers or other third parties; (ii) conducts in contrast with the laws aimed at monitoring financial transactions that may amount to ways of transferring goods or money resulting from criminal offenses, or conducts aimed at financing or supporting terrorist organizations in any way; or (iii) conducts that breach laws on occupational health and safety or environmental laws.

15. Confidentiality

a) In course of the contractual relationship or its establishment, the Customer may have access to or have disclosed to it certain information, material and documents regarding FIAC and its business, assets, intellectual property, drafts, prototypes, drawings, photographs, circuits, calculations, processes and other data related thereto, proprietary information, financial condition, business correspondence, customer lists, prospects and price lists (the "Confidential Information").

b) Without prejudice to any legal obligation, the Customer undertakes not to carry out the following activities and operations with reference to the Confidential Information, directly or through a third party, and not to favor in any way, either directly or indirectly, its fulfillment by third parties:

- to duplicate, in any form and with any modality, Confidential Information, or extract a copy, in any form, of the Confidential Information;
- to disclose, to disseminate, to communicate to third parties and/or make known, by any means of information and/ or communication, in any form, in any area and in any location, Confidential Information;
- to make use, direct or indirect, continuous or even only occasionally, for professional or competitive purposes or for personal profit or advantage, of Confidential Information.

c) The obligations referred to in this article will be in force for the entire duration of the Contract and after its termination. In the event of failure to comply with even just one of the obligations referred to in this article, FIAC will be able to terminate the Contract for cause with immediate effect and, it will be entitled to injunctive relief, specific performance or other appropriate equitable remedies for any such breach.

16. Other provisions

a) No failure or delay by FIAC in exercising any right, power or privilege set forth in these Contract shall operate as a waiver thereof nor shall any single or partial exercise thereof preclude any other or further exercise thereof or the exercise of any other right, power or privilege hereunder.

b) If any of the provisions of this Contract is invalid, null or void, or becomes invalid, null or void, it shall not, in any way, affect the validity or scope of other provisions. In such a case, the invalid or ineffective provision must be replaced by a provision that meets the requirements of the applicable law and the original provision



MICHELIN

Distributed under licence



FIAC PROFESSIONAL AIR COMPRESSORS s.r.l.

Via Isonzo 61, Casalecchio di Reno
40033 Bologna - Italy
Tel: +39 051 678 68 11
fiac@fiac.it - www.fiac.it



www.fiac.it



FIAC PROFESSIONAL AIR COMPRESSORS srl,
in order to constantly improve the products, it reserves the right
to update the features present in this catalog without notice.
Product requirements are indicative.
The images are purely indicative.